

Tempest Mk.II "HI-TECH"

CZ

Historie

V průběhu leteckých bojů druhé světové války obě válčící strany musely reagovat na zavedení nových, výkonnějších typů letadel protivníka. Nasazení nové německé stíhačky Fw 190 v roce 1941 přineslo nejen spěšný vývoj nových verzí stíhačky Spitfire, ale i urychlěný zavedení nových stíhaček Hawker Typhoon Mk.I do řadové služby. Zavedení Typhoonů bylo tak překotné, že se dětské nemoci jeho konstrukce a z počátku velmi poruchového šoupátkového čtyřadvaceti válcového motoru Napier Sabre odstraňovaly až během bojové služby. Brzy se ukázalo, že Typhoon má sice úžasné výkony v malých výškách, ale silný profil křídla a prudce klesající výkon jeho motoru ve výškách nad 5000 m neumožňuje jeho nasazení jako klasické denní stíhačky. (Díky vynikajícím vlastnostem v malých výškách byl nejprve používán jako záchytný stíhač pro malé výšky a pak do konce války jako vynikající stíhači-bitevní letoun).

Hlavní konstruktér Sydney Camm si byl konstrukčními omezeními Typhonu vědom a po konzultacích s Director of Technical Development at Air Ministry zahájil vývoj nového letounu. Ten vycházel z Typhonu a nesl předběžné označení Typhoon Mk.II. V průběhu konstrukčních prací bylo reagováno na připomínky bojových pilotů létajících na Typhonech. Změn konstrukce bylo nakonec tolik, že nový letoun dostal jméno Tempest. Byl poslední konstrukcí S. Camma s trubkovou konstrukcí střední části trupu (další jeho stíhačky typy měly již konstrukci skopepinovou). S. Camm navrhl několik verzí, lišících se pohonnou jednotkou. Tempest Mk.I s motorem Napier Sabre IV a chladiči v křidlech zůstal v prototypu díky problémům s pohonnou jednotkou. Tempest Mk.II s motorem Bristol Centaurus IV nabízel vyšší výkon a odolnost hvězdicového motoru proti poškození. Byl vybrán do sériové výroby jako hlavní verze. Problemy s spolehlivostí motoru ale způsobily, že první sériové stroje se dostaly k bojovým jednotkám na jaře 1945 a do bojů již nezasáhly. Tempesty Mk.III a Mk.IV měly být poháněny motory R&R Griffon. Díky nedostatku motorů (byly přednostně určeny pro nové verze Spitfiru a stroje námořního letectva) nebyly tyto verze vůbec vyrobeny. Do sériové výroby se díky tomu dostala verze Tempest Mk.V s motorem Sabre Mk.II. Jeho prototyp HM595 vznikl přestavbou prototypu Tempestu Mk.I (a ten zase modifikací trupu Typhona téhož sériového čísla). Měl, jako všechny Tempesty nové eliptické křídlo s laminárním profilem. Během testování prototypu byly zvětšeny ocasní plochy a zavedena kapkovitá kabina s překrytem odsunovaným vzad. Do testování se zapojily i další prototypy, navíc byly využity zkoušenosti bojových pilotů, hlavně S/L R.P. Beamonta, který se na vývoji Tempestu přímo podílel. Co nejrychleji byla zavedena sériová výroba, která dala přibližně sto kusů varianty Tempest Mk.V series 1 s kanóny staršího typu B. Hispano Mk.II a pak přesná na Tempest Mk.V series 2 s kanóny B. Hispano Mk.V. Stroj HM595 posloužil i jako prototyp poslék i se svou bojovou verze Tempest Mk.VI. Tato verze dostala vylepšený motor Sabre Mk.V. Potřeba lepšího chlazení výkonnéjšího motoru vedla k přesunu chladiče oleje a saní karburátorů do kořene křídla. Vzhledem k tomu, že se počítalo s nasazením na blízkém a středním východě, dostala tato verze pouště filtr pod trup. Výroba byla zahájena v roce 1944, ale do bojů se tato verze dostala až v období vzniku státu Izrael a první arabsko-židovské války.

Do bojů druhé světové války se Tempesty Mk.V zapojily v květnu 1944 v rámci 150. wingu (No.3, No.56 a No.486 (RNZAF) sqn.) pod vedením W/Cdr. R.P. Beamonta. Ten také jako první pilot Tempestu sestřelil 8.6.1944 nepřátelský letoun. Zatím 150. wingu byly nasazeny proti střelám V-1, Tempesty byly urychleně zaváděny k dalším jednotkám v rámci 2. TAF. Až do konce války byly Tempesty nasazovány k vybojování vzdušné převahy, útokům na pozemní cíle a díky dlouhému doletu dálkovým přepadům letišť a jiných cílů v nepřátelském zázemí. Vzhledem k výkonům se plně vyrovnaly všem nepřátelským stíhačkám a větší bezpečí jim hrozilo od nepřátelského protiletadlové palby. Staly se symbolem vítězství RAF na konci války. Po válce tvorily Tempesty Mk.V a také Mk.II výzbroj britských okupačních sil v Německu a sloužily i na domácích ostrovech. Část Tempestů Mk.VI byla přestavěna na vlekače terčů a přeznačena na TT.5. Tempesty Mk.II byly nasazeny i v Indii a Malajsii v rámci operace Firedog proti komunistickým povstalcům. Tempesty Mk.VI sloužily v poválečném období v Palestině a Iráku. Tempesty Mk.II byly dodány po válce Indickému a Pákistánskému letectvu.

Rozpětí: 12,50 m, délka: 10,26 m, max. rychlosť: 685 km/h ve výšce 5 600 m, dolet/ci. nádržemi: 1190 km/2460 km, dostup: 11 150 m, výzbroj: 4x kanón ráže 20 mm

History

EN

During WW2 the opposing sides were constantly competing against each other to keep abreast of the latest technological developments and as a result this led to ever more powerful and effective warplanes. In 1941 the new Fw 190 fighter began to enter service and the British hastily developed the Spitfire Mk.V into the Mk.IX with a better engine, and also introduced a new type called the Hawker Typhoon Mk.I into the service too. The Typhoon airframe and engine (a H-24-cylinder sleeve valve Napier Sabre powerplant, extremely unreliable at first) were both rushed into service and they suffered from a number of teething troubles which were gradually improved during the service life of the aircraft. The new Typhoon proved to be superior in performance against the Fw 190 at low altitude, but due to the thick wing airfoil section and the fact that the performance of the engine decreased at heights above 5,000m, it became clear that the Typhoon would not fit the requirements for a standard day fighter aircraft. Therefore the Typhoon was used primarily as a low altitude interceptor fighter aircraft but it was soon developed into an outstanding fighter-bomber, a role for which it became famous.

Sir Sydney Camm, Hawker's chief designer famous for the Hurricane, was fully aware of restrictions of his Typhoon design. Following lengthy discussions with the Director of Technical Development at the Air Ministry he began to design a new aircraft partially based on the Typhoon. At first this was known as the Typhoon Mk.II but as it developed, taking into consideration the observations of operational Typhoon pilots, so many alterations were made to the basic design (e.g. all new elliptical shaped laminar flow cross-sectioned wing) that it was renamed as the Tempest. This was Camm's last design to incorporate the tubular framed structure of the mid fuselage section as all of his subsequent aircraft would be fully monocoque structures instead.

The new Tempest was originally planned to be built with three totally different powerplant options. The Mk.I was fitted with a Napier Sabre IV engine and had the radiators mounted in the wings but it did not progress beyond the prototype stages in this form. The Tempest Mk.II with Bristol Centaurus IV powerplant seemed to offer much higher performance and it was better suited to tropical conditions so it was approved for full production but unfortunately problems with the Centaurus and a low development priority for this version prevented the machine from reaching operational units until the spring of 1945 and so it saw no action in WW2. The Tempest Mk.III and Mk.IV were supposed to be fitted with R&R Griffon powerplants, but these engines were in short supply as the Spitfire and Firefly took precedence for this powerplant and therefore these versions just never materialised.





Due to delays with the Tempest Mk.II programme caused by problems with the Centaurus, the Napier Sabre option was developed further and it finally led to the Tempest Mk.V powered by the improved Sabre II and this was the only Tempest variant to see front line use during WW2. The prototype for the Mk.V variant was HM595 (originally flown as the Tempest Mk.I prototype too) but in its new form the radiator was moved to the chin position and some alterations to the airframe were incorporated during testing including an enlarged tail plane and rearward-sliding bubble-shaped cockpit canopy. Several other pre production Mk.V's were used during the development phases and one of the operational pilots involved in these trials was Sqn. Ldr. R.P.Beamont.

The Tempest Mk.V was rushed into production and the first one hundred or so machines consisted of the Tempest Mk.V series 1 variant with earlier British Hispano Mk.II cannon. Later variants, known as the Tempest Mk.V series 2 were fitted with shorter barreled Mk.V cannons. Tempest HM595 was also used as the prototype for the final Tempest version, the Mk.VI which had an improved Sabre Mk.V powerplant. The additional power of this engine needed a much more efficient cooling system and this led to relocation of an additional radiator and the carburettor air intake into the wing root section. As this final variant was also supposed to fly over desert areas of the Middle East it was tropicalised using a dust filter under the centre section of the wing. This version did not enter service until after WW2 but saw limited and unfortunate action with the RAF during the first Arab-Israeli war in 1948.

The Tempest Mk.V entered operational service in May 1944, serving with No.150 Wing (Sqn No.3, No.56 and No.486 (RNZAF)) under the command of W/Cdr R.P.Beamont. He was also the very first Tempest pilot to achieve an aerial victory, this occurring on June 8, 1944. The Tempest was the fastest Allied piston-engined type during WW2 and due to this 150 Wing were retained in the UK to help counter the V1 flying bomb offensive. As more Tempests entered service they went on to equip units of the 2nd TAF in NW Europe. Until the end of hostilities in Europe, the Tempests were used mainly in the aerial superiority role and thanks to their high performance, the Mk.V version was on a par with all comparable enemy fighter aircraft. But by this late stage of the war the main threat came from enemy anti-aircraft fire, especially while undertaking ground attack sorties.

Following the end of the war, the Tempest Mk.V and Mk.II went on to equip the majority of British Air Force of Occupation units serving in Germany. Some of the Mk.V's were converted to become TT.MK.5 target tugs which were used by RAF Armament Practice Camps in the UK and Germany. The Tempest Mk.II also saw post war service in pre partition India and later in Malaya where they saw action against communist insurgents during Operation Firedog. After India was partitioned the Tempest Mk.II was supplied to the new air forces of both India and Pakistan. The Mk.VI Tempest also saw post-war service in Palestina and Iraq.

Wingspan: 12.50 m, Length: 10.26 m, Top Speed: 685 km/h at 5,600 m, Range / with ext.fuel tanks: 1,190 km/2,460 km, Ceiling: 11,150 m, Armament: 4x 20 mm cannon

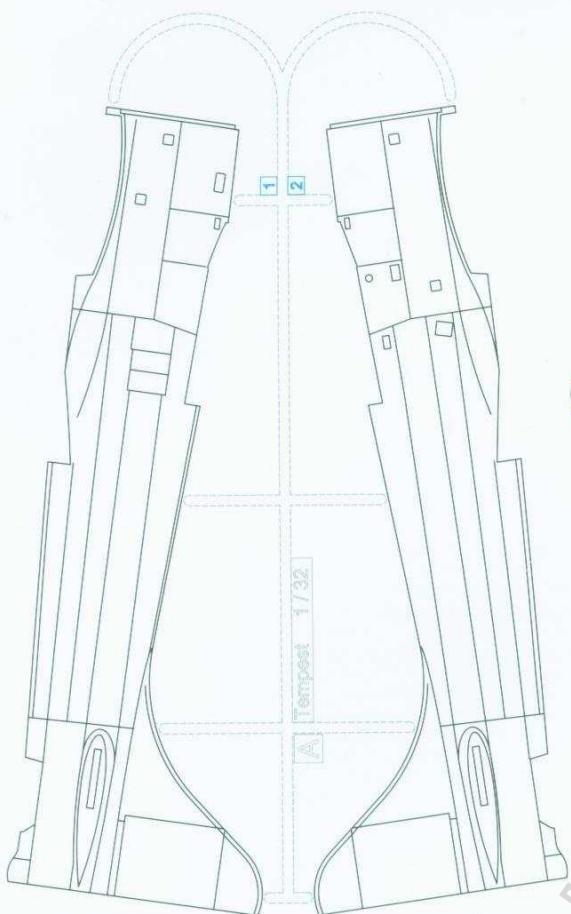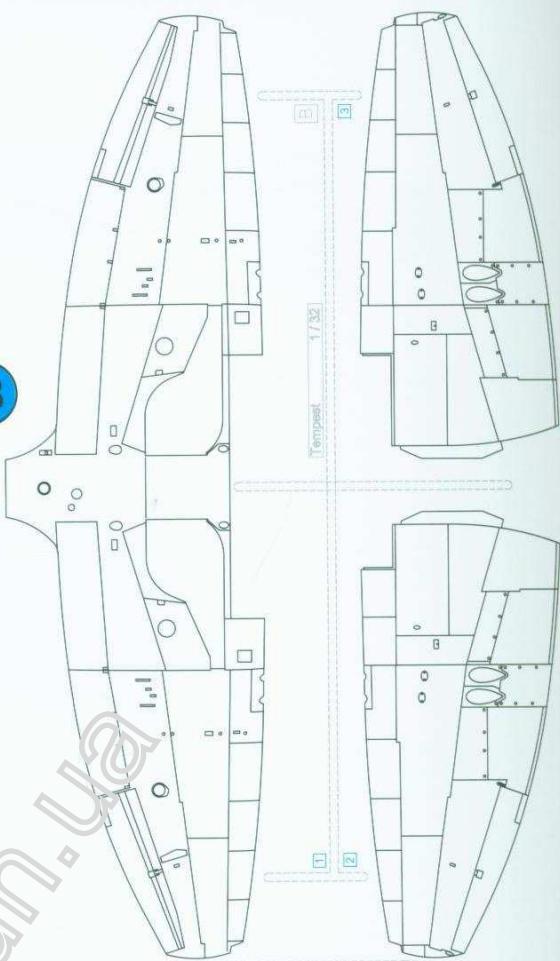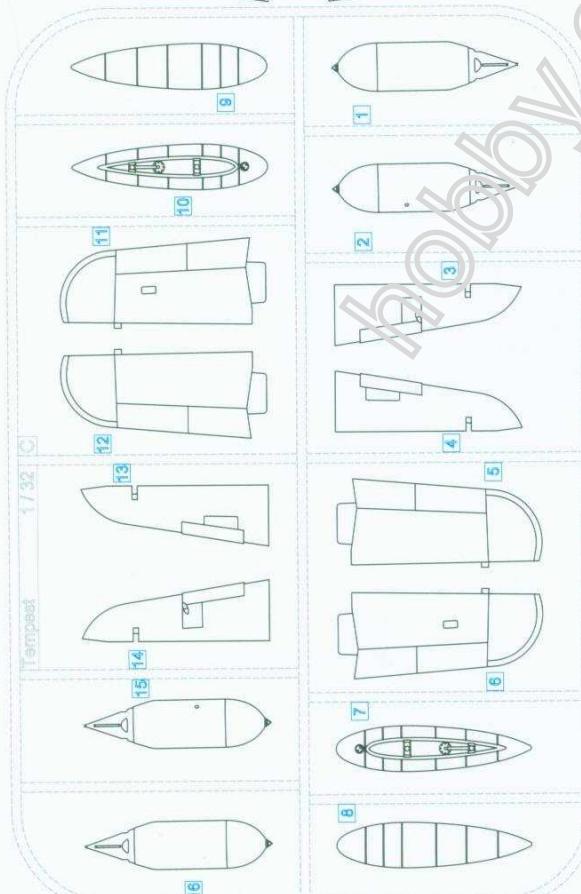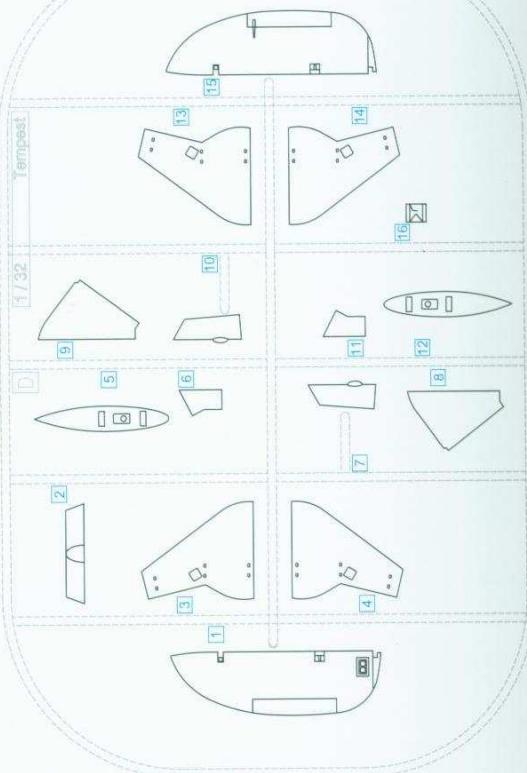A**B****C****D****SYMBOLS**

MOŽNOST VOLBY
OPTIONAL
NACH BELIEBEN
OPTION

POUŽIT KYANOAKRYLÁTOVÉ LEPIDLO
INSTANT CYANOACRYLATE GLUE
ZYANOAKRYLATKLEBER
ADHESIF CYANOACRYLAT

OHNOT
BEND
BIEGEN
COURBER


ZHOTOVIT NOVĚ
SCRATCH BUILD
FERTIGSTELLEN
ACHEVER




ŘEZAT/VRTAT
CUT OFF/DRILL
ENTFERNEN
DETACHER

GSI A
colours code
NATRÍT
COLOUR
FARBEN
PEINDRE


F

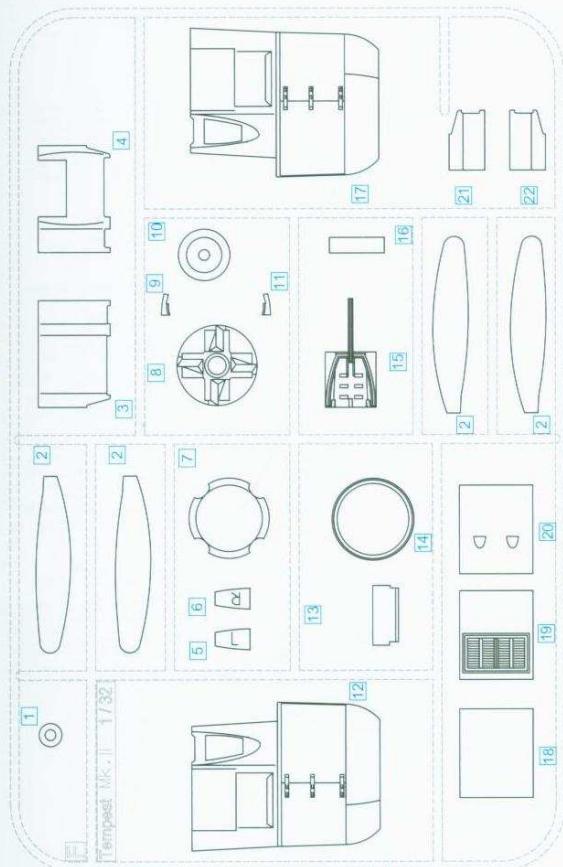


H

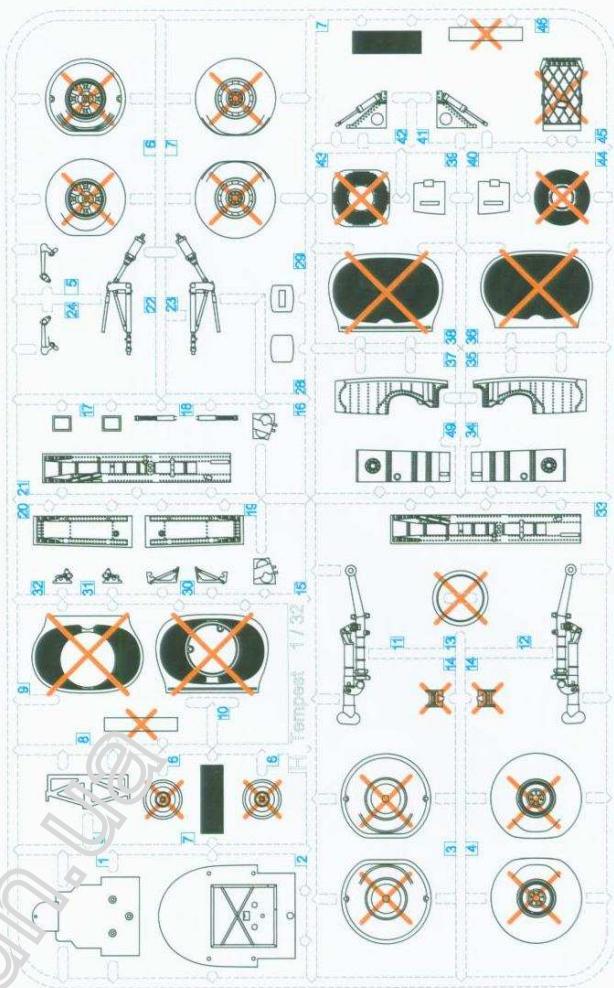

I



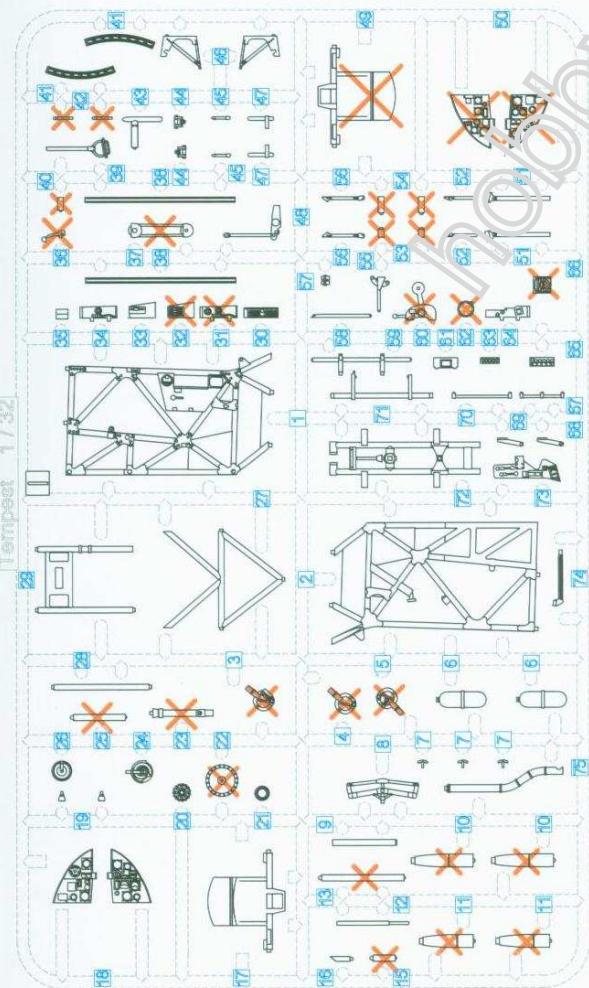


J

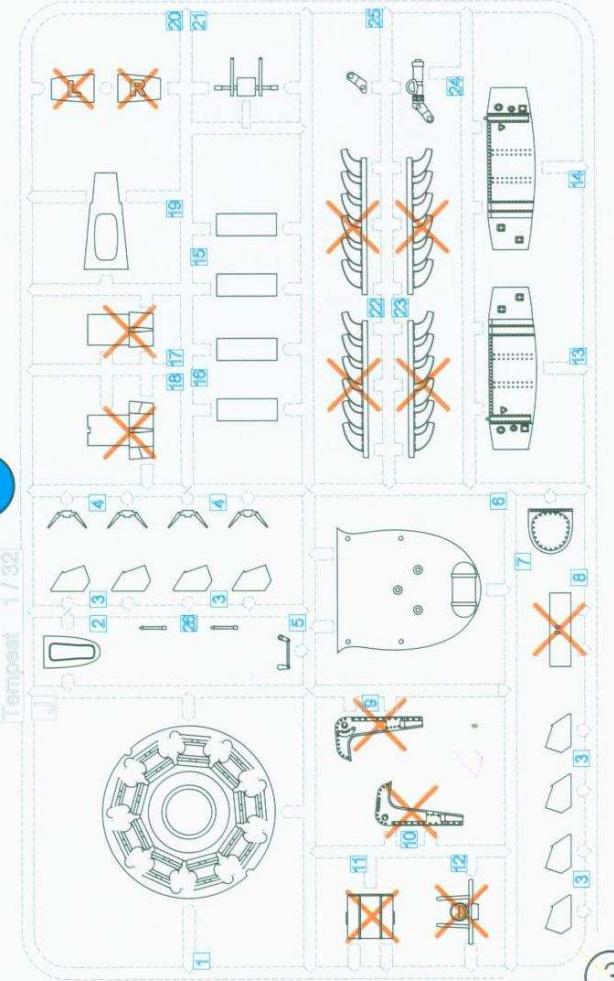


SH32054 Hawker Tempest Mk.II

(3)

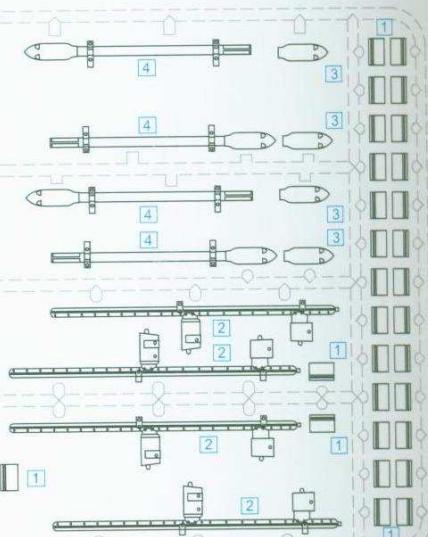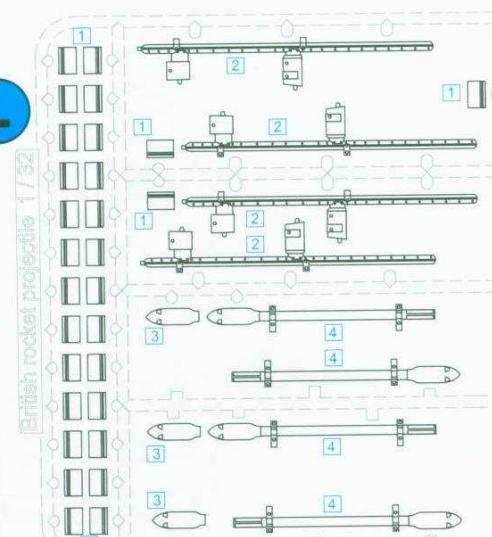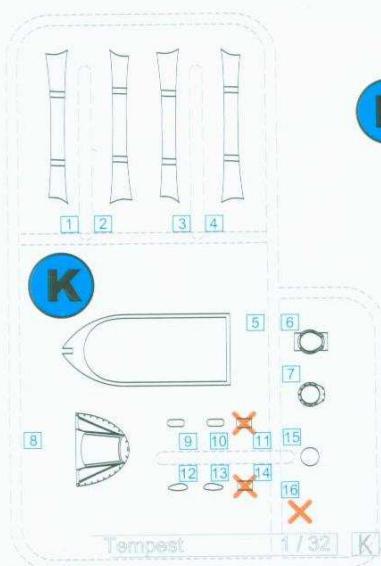

PUR parts PUR1-PUR37

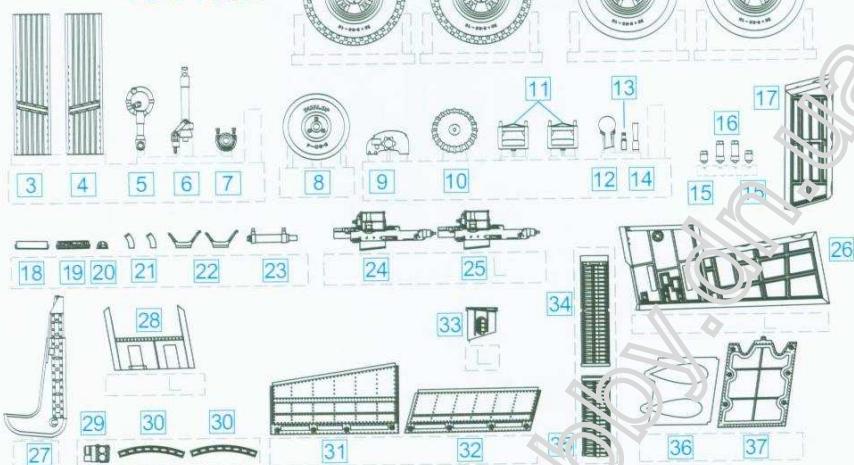






LAS1-LAS8









paint masks



PHOTO-ETCHED parts PE1-PE24

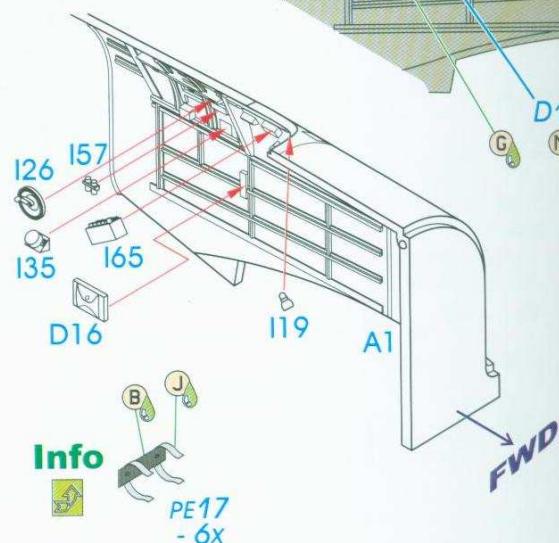
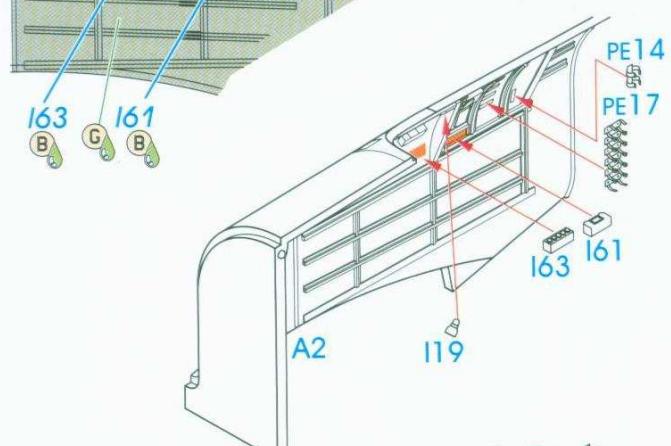
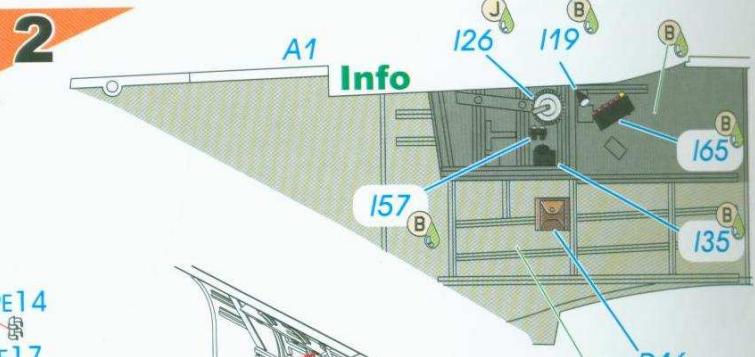
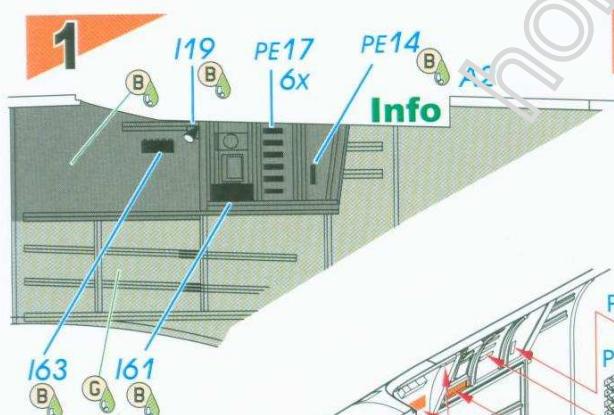
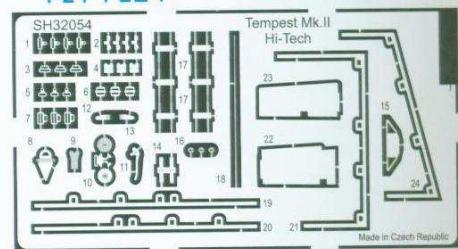


④ SH32054 Hawker Tempest Mk.II

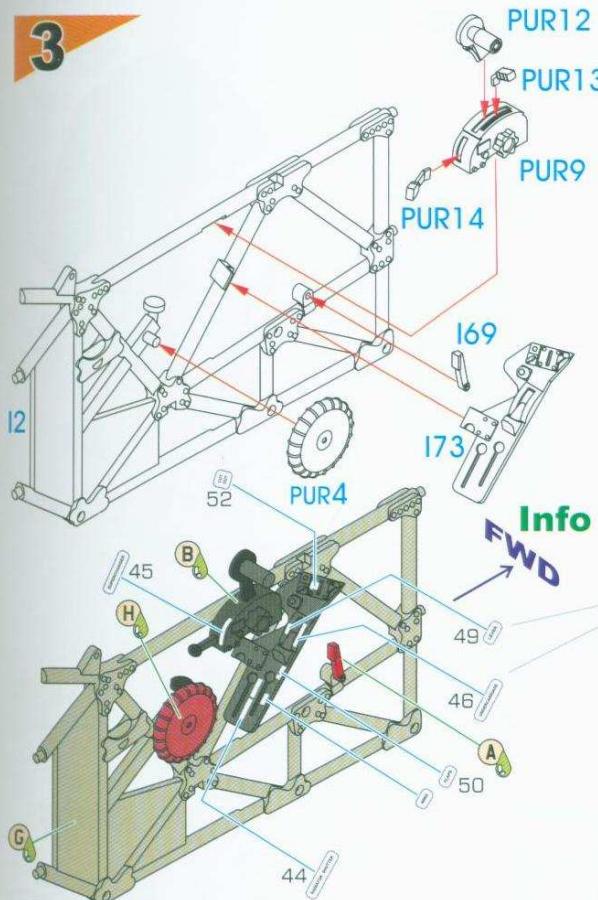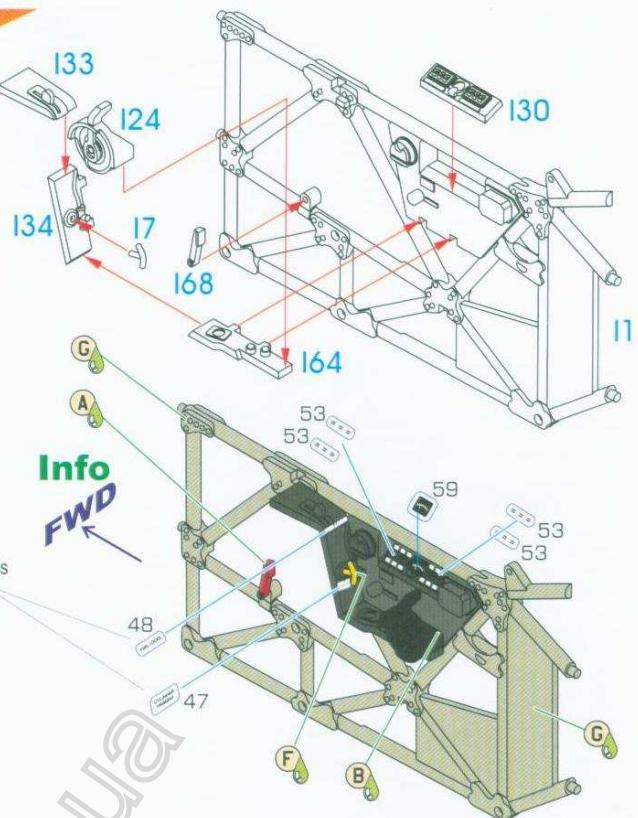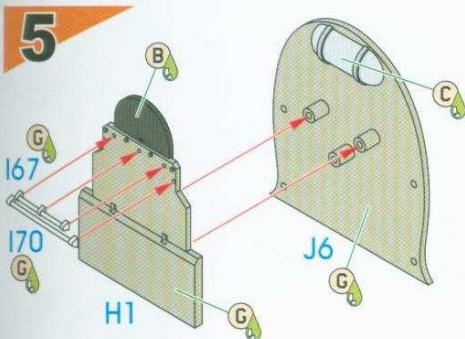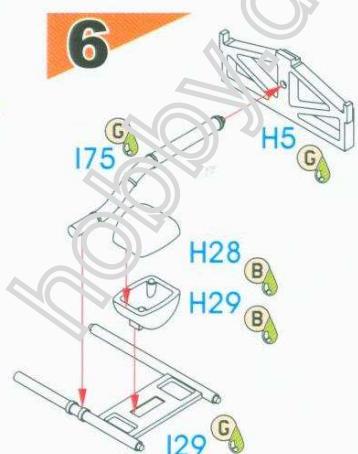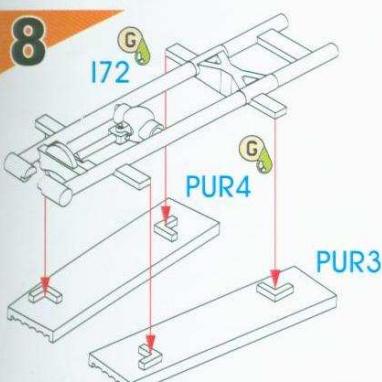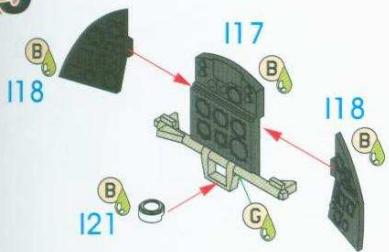3**4****5****6****8****9****10**


SH32054 Hawker Tempest Mk.II

(5)

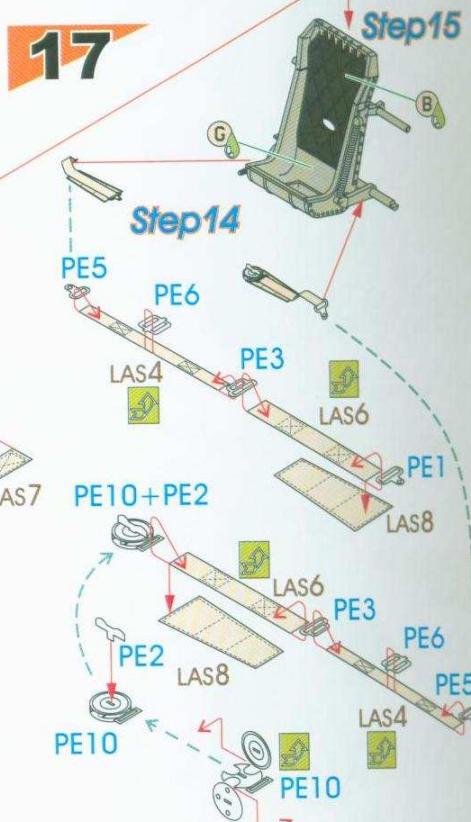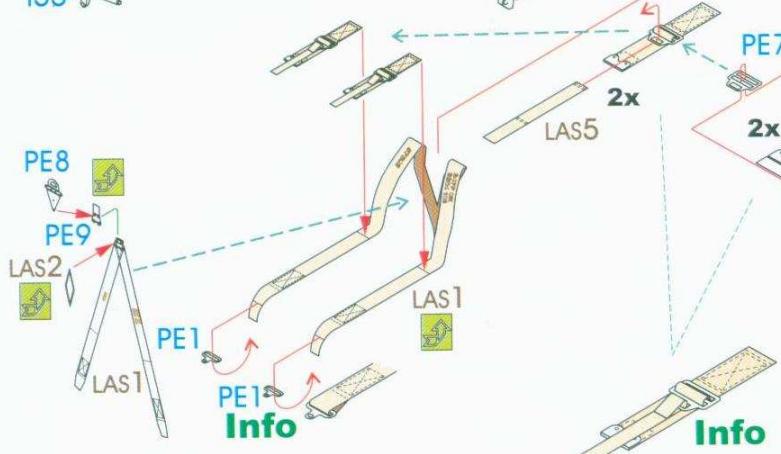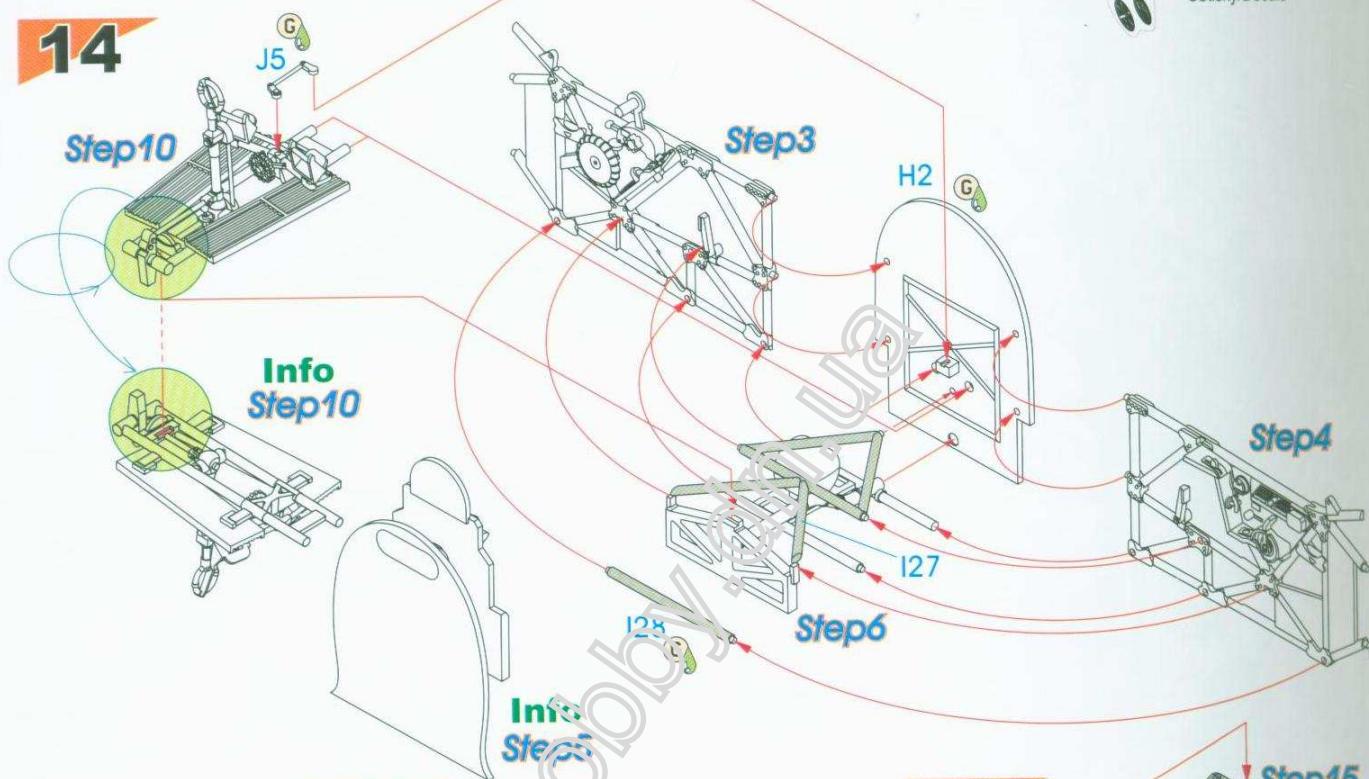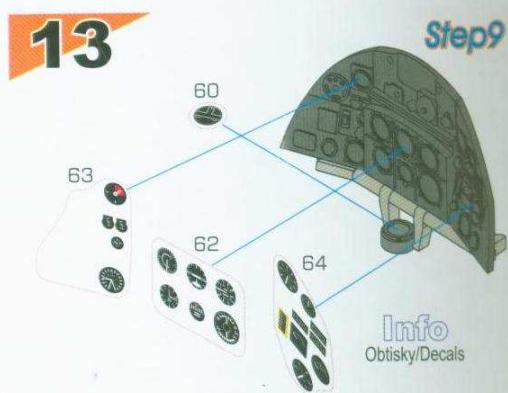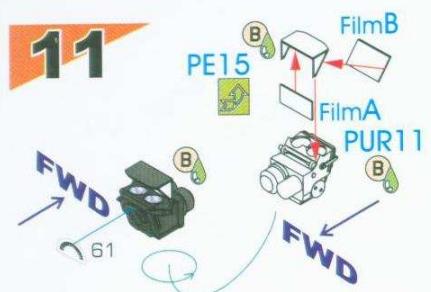


18

Step14

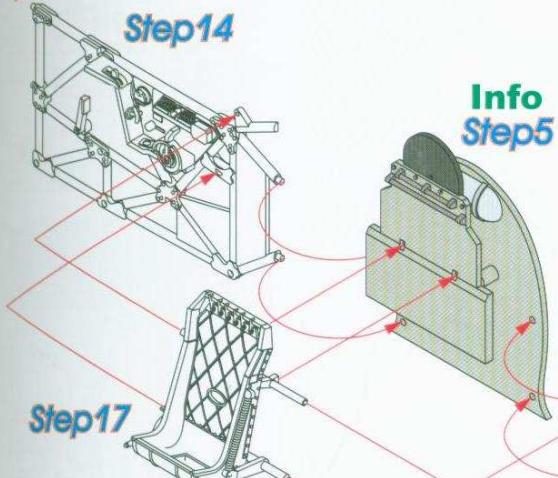**19**

Step12

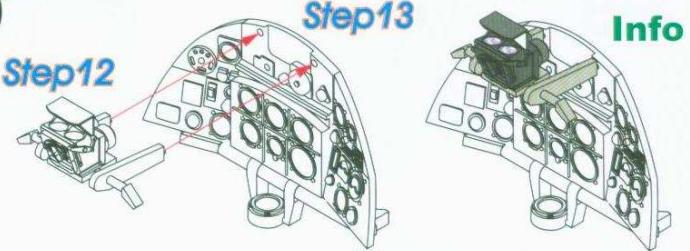

Step13


Info

Step17
page 6**Info for parts
LAS1 - LAS8**



1. Take the precut textile part out of the sheet.
 2. Remove supporting paper.
 3. Crumple the belt into a little ball and need it between the fingers.
 4. Thread the belts through the buckles - use superglue.
 5. Put the belts into the seat.
 6. Spray by the glossy varnish.
 7. Impregnate the belts with very diluted oil color (mix black and brown) - it will highlight the texture.
 8. Spray by matt varnish.
- After the varnish becomes dry it is possible to drybrush with light oil colour.

20

Step19



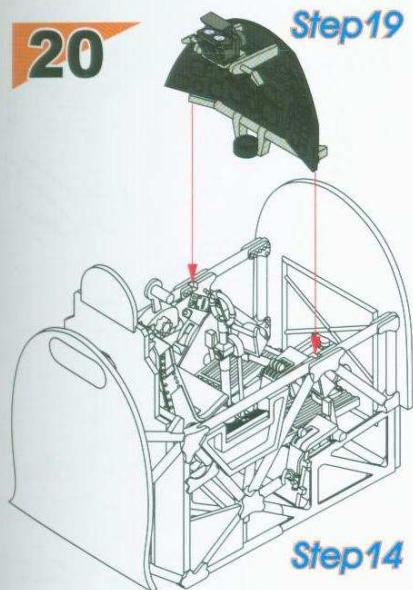


Step14

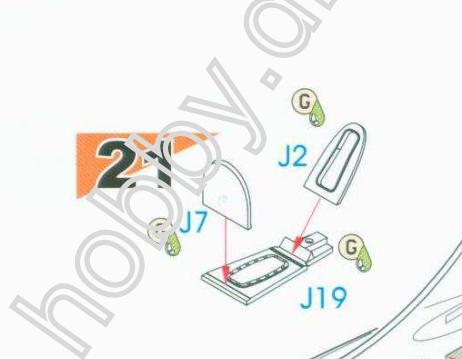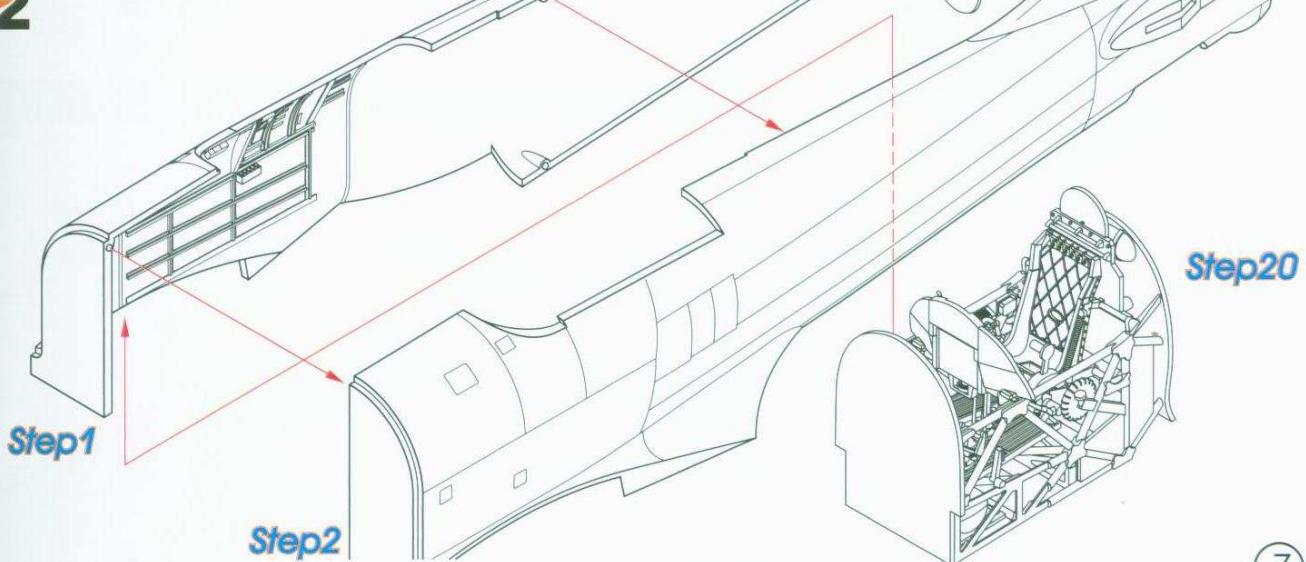
Larkspur
www.larkspur.cz**22**

SH32054 Hawker Tempest Mk.II

(7)

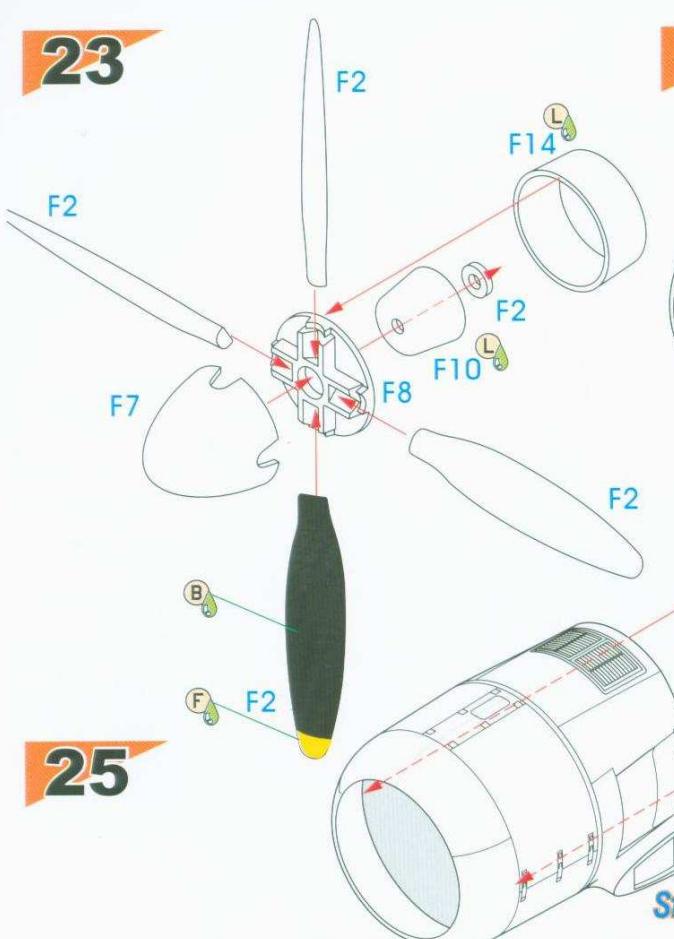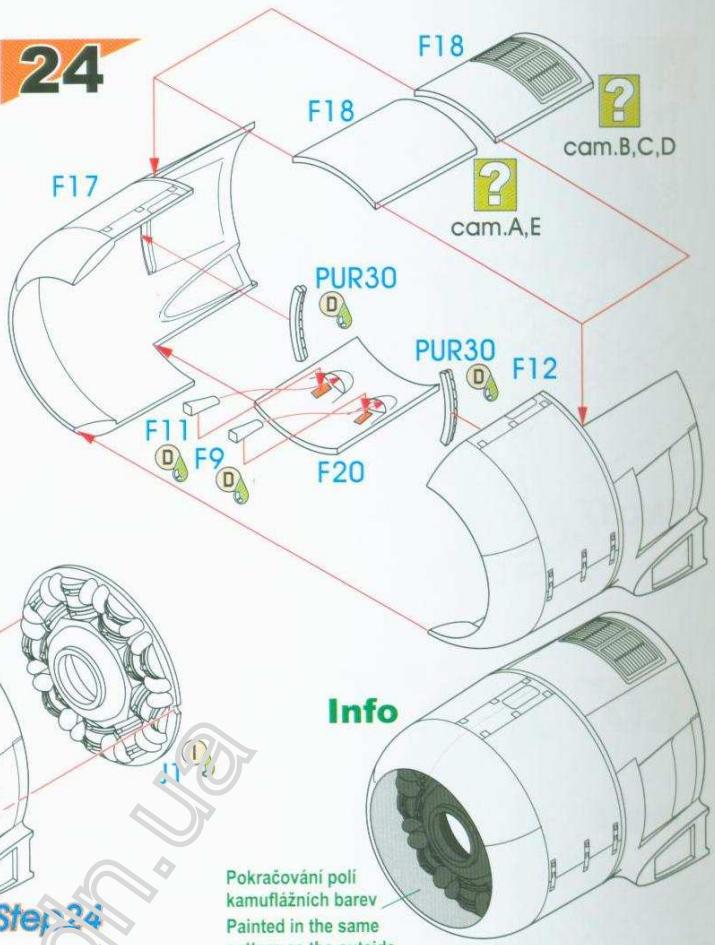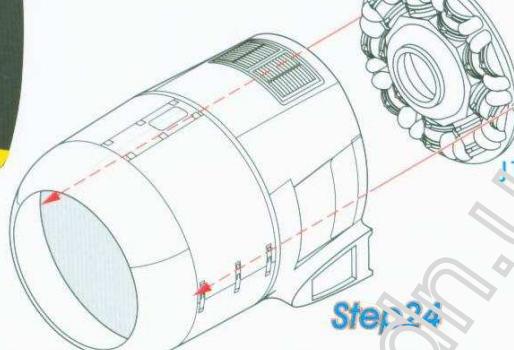23**24****25**

Step 24

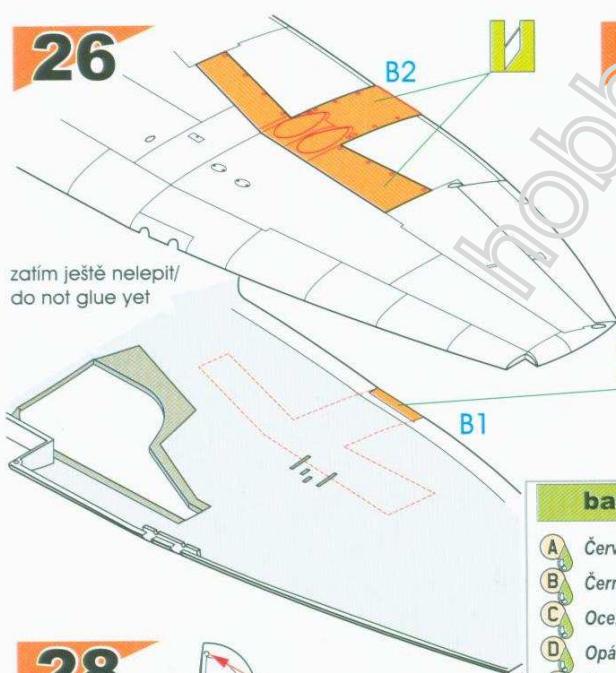26**H** pro/for
Step31**barvy/ colours****GUNZE SANGYO****Alclad II**

A	Červená/ RED	H3/C3
B	Černá/ BLACK	H12/C33
C	Ocelová/ STEEL	H18/C28
D	Opálený kov/ BURNT IRON	H76/C61
E	Černá na pneu./ TIRE BLACK	H77/C137
F	Žlutá/ YELLOW	H329/C329
G	Šedozelená interiér./ INTERIOR GREY GREEN	H334/C334
H	Červenohnědá/ RED BROWN	H47/C41
I	Tmavý kov/ DARK IRON	MC214
J	Hliník/ ALUMINIUM	MC218
K	Mosaz/ BRASS	MC219
L	Motor. šedá/ ENGINE GREY	H339/C339
M	Barva kůže/ LEATHER	H37/C43

28

(8)

SH32054 Hawker Tempest Mk.II

29K6
Info

použít masky/
apply masks
Červená číra/
CLEAR RED
Zelená číra/
CLEAR GREEN
paint masks

Infoodstranit masky/
remove masks

H35

30**Info**NOTE/Pozn.
Vyrtejte příslušné otvory pro montáž nádrží či bomb nebo raket, viz str. 12 step 48 nebo str. 13 step 51.

Drill holes to fit the tanks, bombs or the rocket armament, see p. 12 step 48 or p. 13 step 51.





PUR15

PUR16

Info**Info****31****32****Step26**
B2,B3**Step31****Step29****B1****H21****J13****J14****H33****H37****H34****H39****L21****L20****L19****G****lanka/wires****PUR17****PUR26****H40****H49****H20****H21****J13****J14****H33****H37****H34****H39****L24****G****SH32054 Hawker Tempest Mk.II****9**




33**Step32**

Info
 pohled zespoda/
 the bottom view
 B1 vyněchán/
 B1 omitted

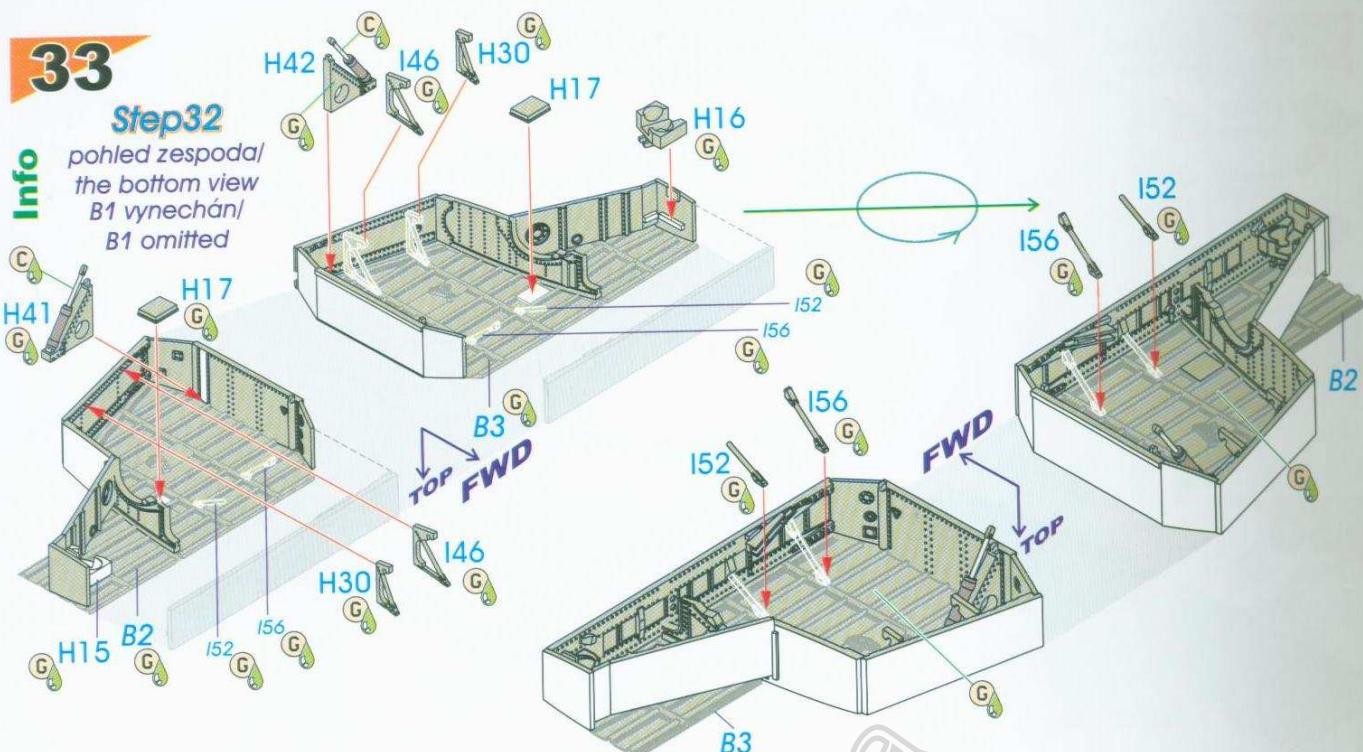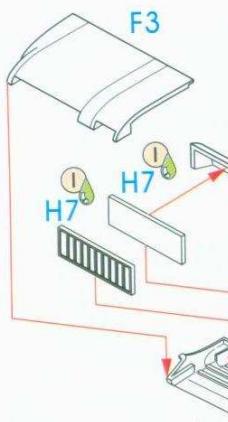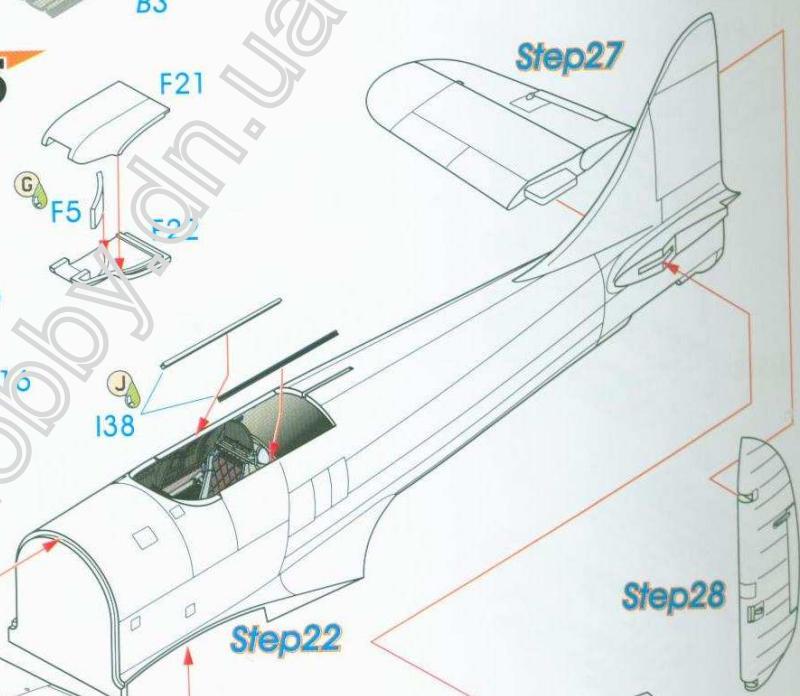

**34****35****Step27****36****Step25**




Pokračování poli
 kamuflážních barev
 Painted in the same
 pattern as the outside

Step33**Step27****Step35****Step34**

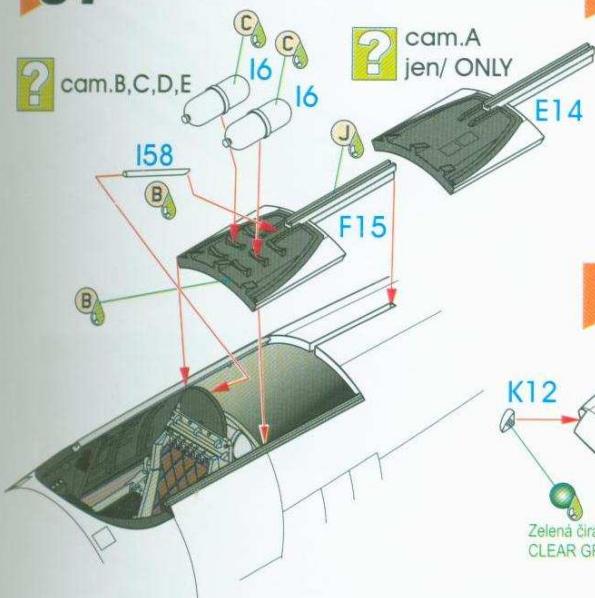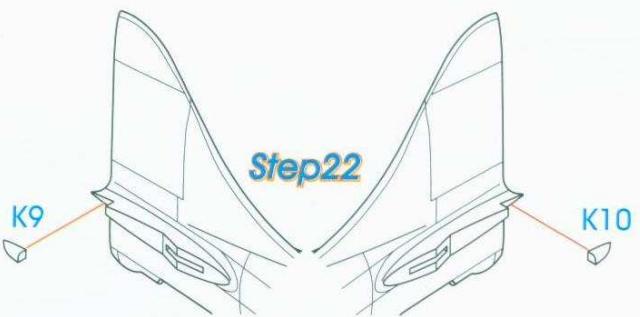
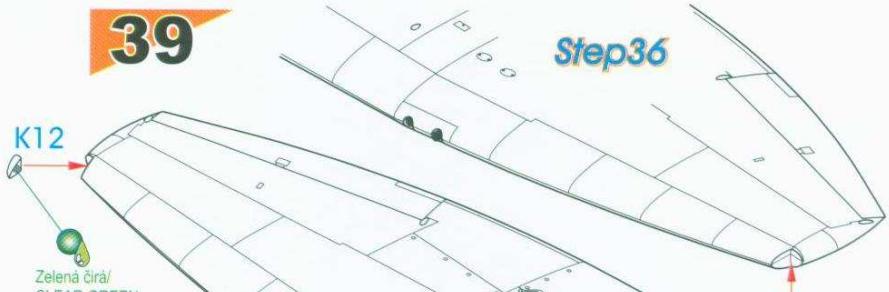
37**38****39****40**


Step29
Info
pohled zespoda/
the bottom view
B1,B2,B3 vyněchány/
B1,B2,B3 omitted

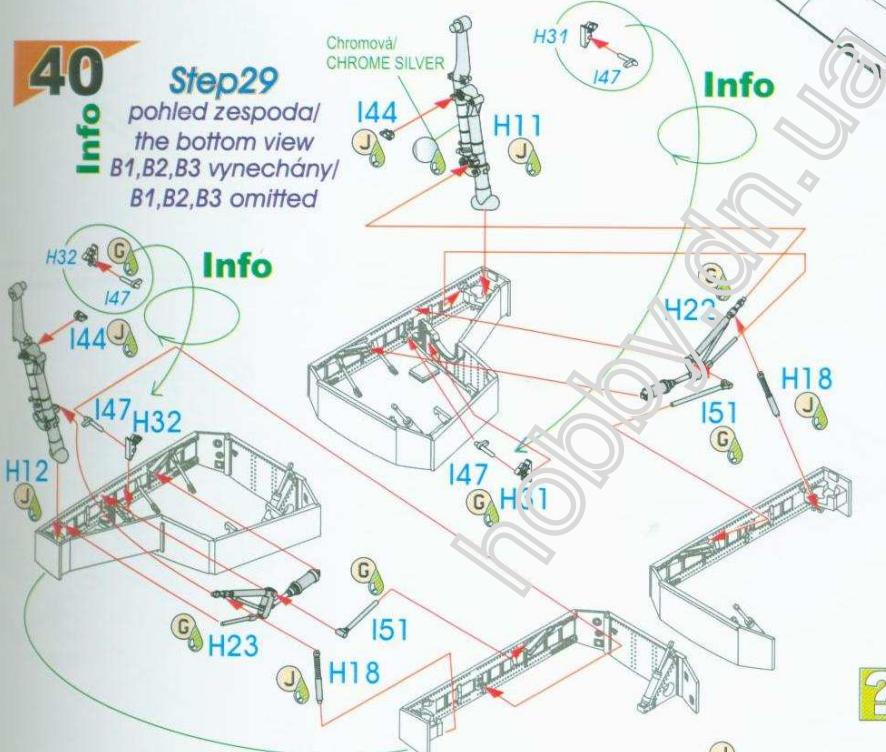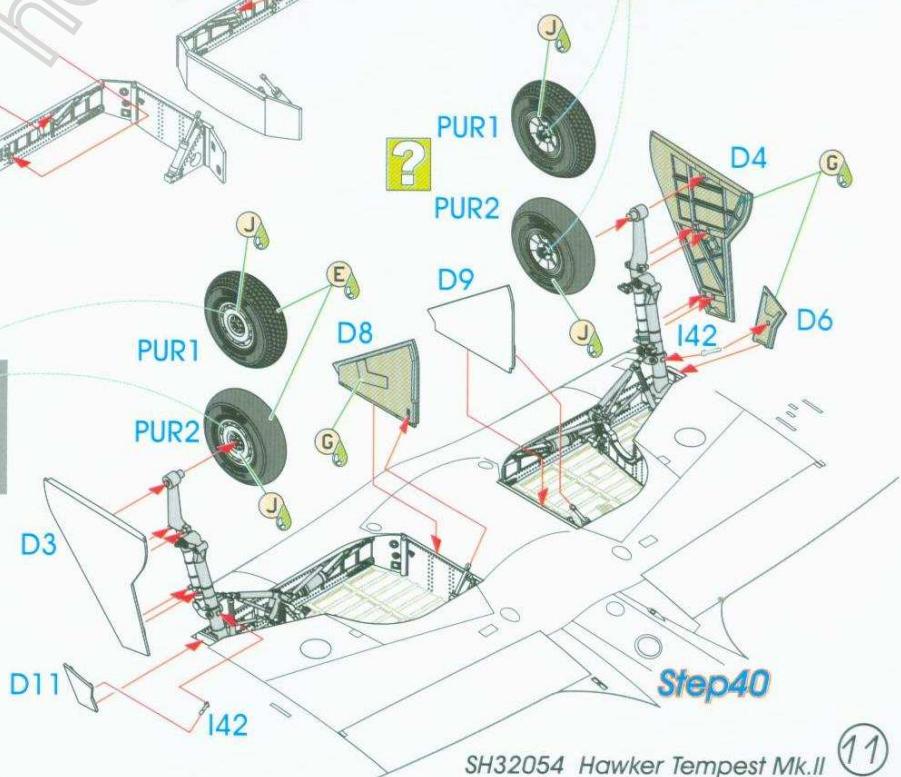**41**

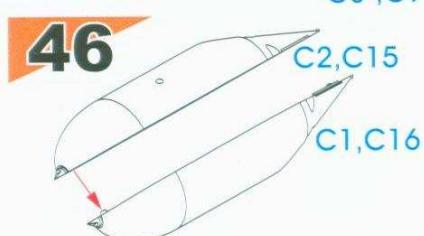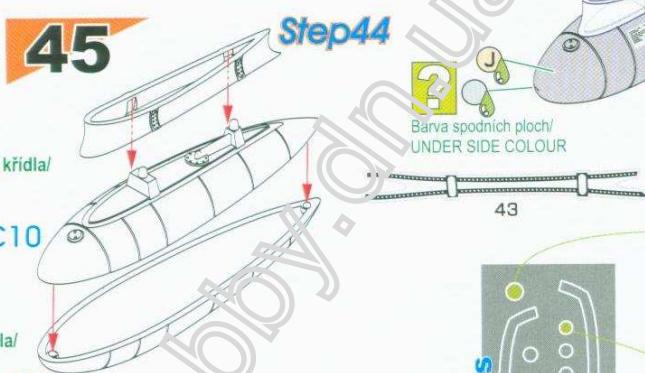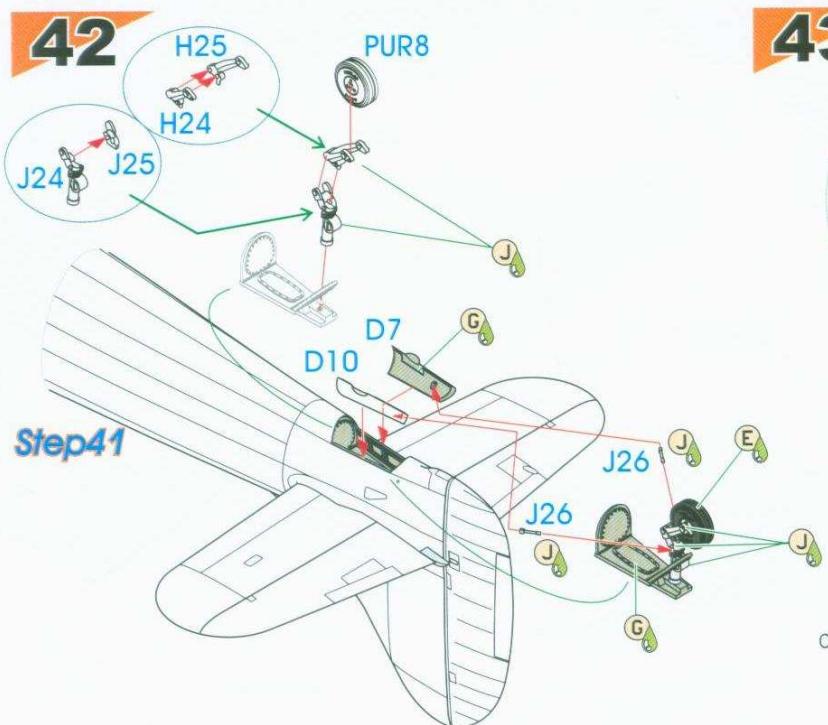


48 ?

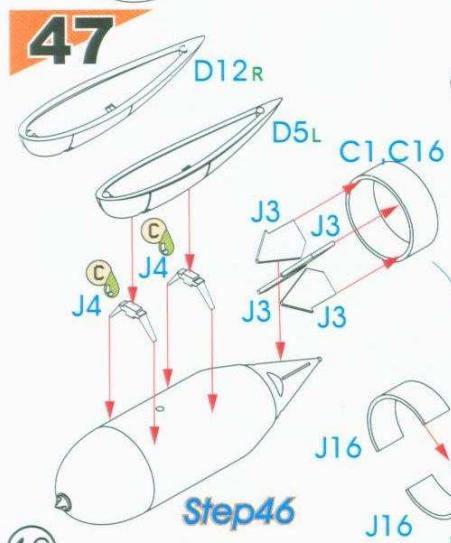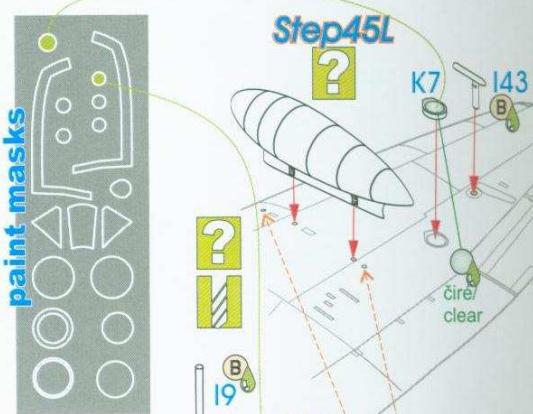

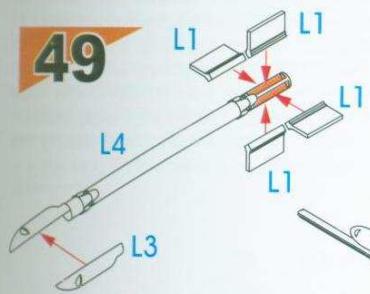


51 ?

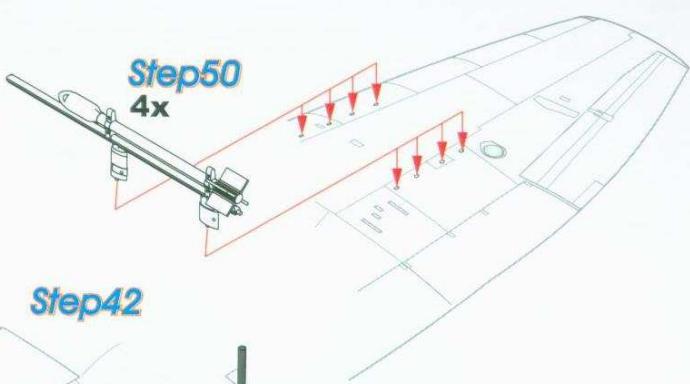


Step50 4x

Step42

50 **Step49**

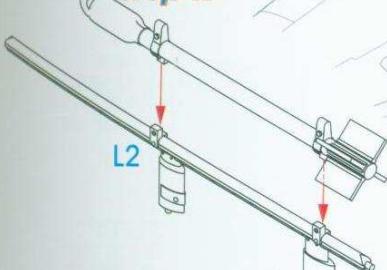

52

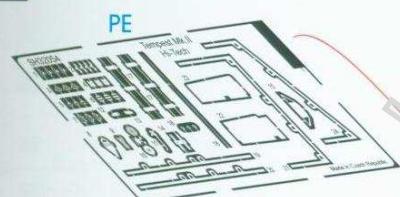

Tmavě zelená/
BRONZE GREEN

Barva spodních ploch/
UNDER SIDE COLOUR


Info

Pohyblivé/
movable

K5

PE18


PE16

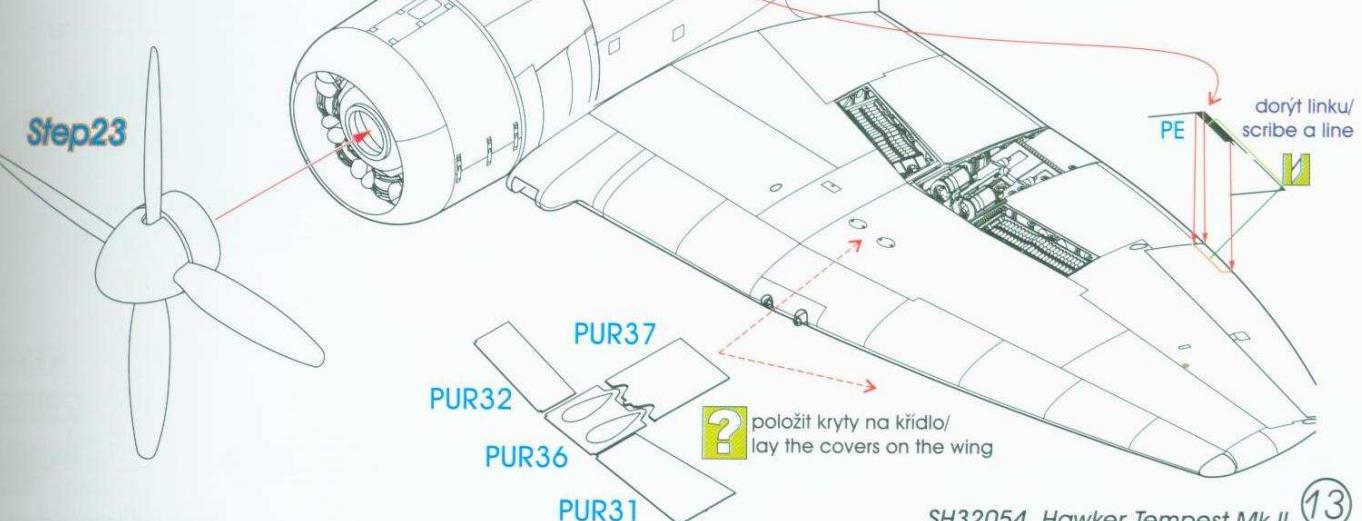

Tempest Mk.II, HF-X / MW774, No.183 Sqn. RAF, Chilbolton, srpen 1945. Stroj, patřící původně No.54. Sqn RAF, na kterou byla No.183 Sqn. přečíslována, byl vybaven závěsníky pum pod křídly. První série Tempestů Mk.II se seriály začínajícími písmeny MW, dostala identifikacní marking, aby nedocházelo k zaměnám s Fw 190. Marking byl tvořen bílým kuželem vrtule, 12 palců širokým pruhem bílé na krytu motoru a pruhy na ocasních plochách. V létě 1945 byl kužel vrtule u MW774 přestříkan tmavou barvou.

Tempest Mk.II, HF-X / MW774, No.183 Sqn. RAF, Chilbolton, August 1945. Originally assigned to no.54 sqn RAF which were later renumbered to no.183. The aircraft was equipped with underwing bomb pylons. The first Mk.II Tempest series with serial numbers beginning with MW letters wore a special identification marking to avoid confusion with the Fw 190s, this marking consisting of a white propeller spinner, a 12 inch wide stripe on the engine cowling and similar stripes on the empennage. During the summer of 1945, the spinner of MW774 was repainted with a dark colour.

CAM. A

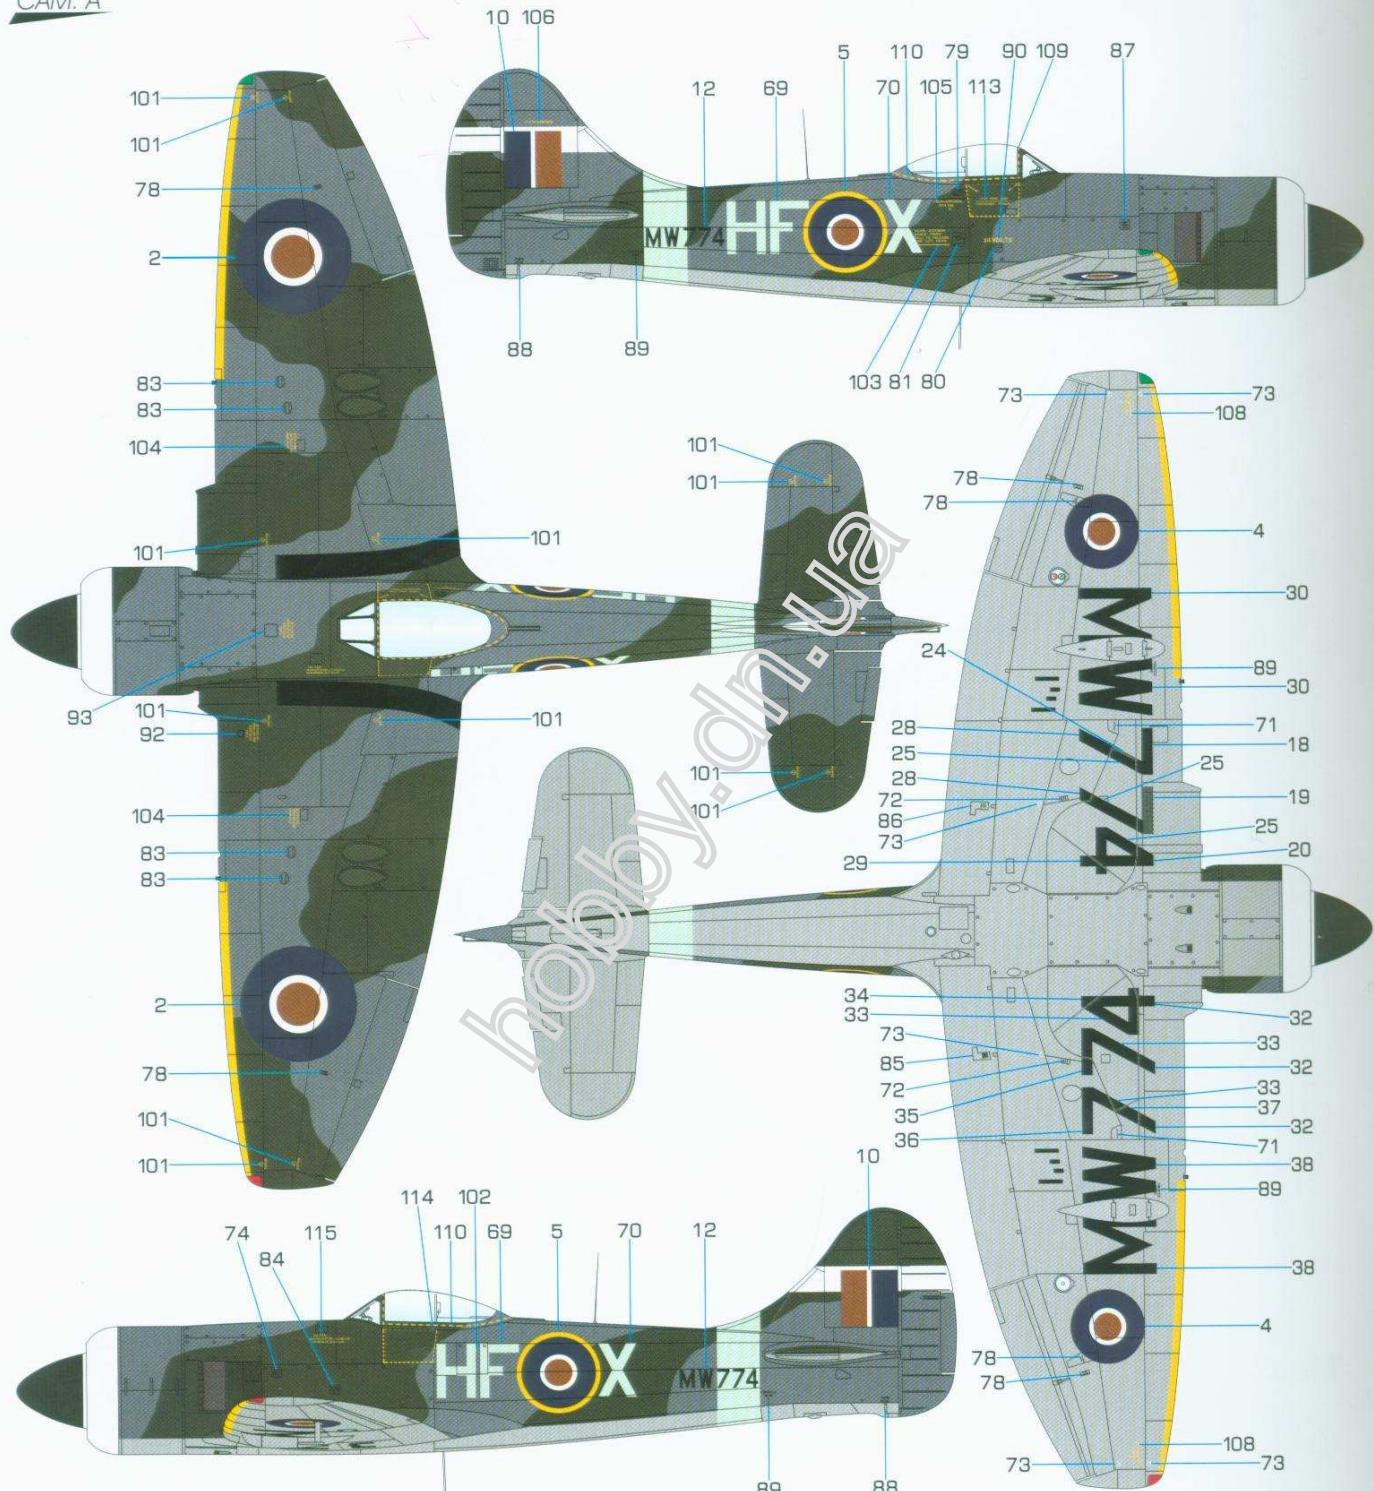

Černá
Black
H2/C2

Tmavá zelená
Dark Green
H73/C23
ALCE013

Oceánská šedá
Ocean Grey
C362
ALCE004

St edn mo ská šedá
Medium Sea Grey
H335/C335
ALCE003

special
HOBBY
 GUNZE
SANGYO

Anglais II

2016/10


Impost Mk. II

SH32054 Tempest Mk. II

Tempest Mk.II, 5R-V / PR533, No.33 Sqn. RAF, Kuala Lumpur, Malajsko, 1949. No.33 Sqn. byla nasazena proti komunistickým povstalcům v Malajsku. Tato jiná stroje této jednotky byl Tempest PR533 přestíkán hliníkovou barvou přes původní kamouflážní nátěr. Seriál na spodní straně křídla po přestíkání nebyl obnoven. Hliníková barva se v pršném a vzhledem tropickém prostředí loupala, stejně jako pruh proti oslnění. PR533 byl vybaven závěsníky raket pod křídlem.

Tempest Mk.II, 5R-V / PR533, No.33 Sqn. RAF, Kuala Lumpur, Malaya, 1949. No.33 Squadron was put into action against communist insurgents in Malaya. Tempest PR533, as well as other machines of this unit, received aluminium paint over its original camouflage scheme. The serial numbers on the wing underside were not applied after repainting. The new finish and the black anti glare panel were prone to rapid peeling in the dusty and humid tropical environment. This airframe was also fitted with rocket attachment points under its wings.

CAM. B

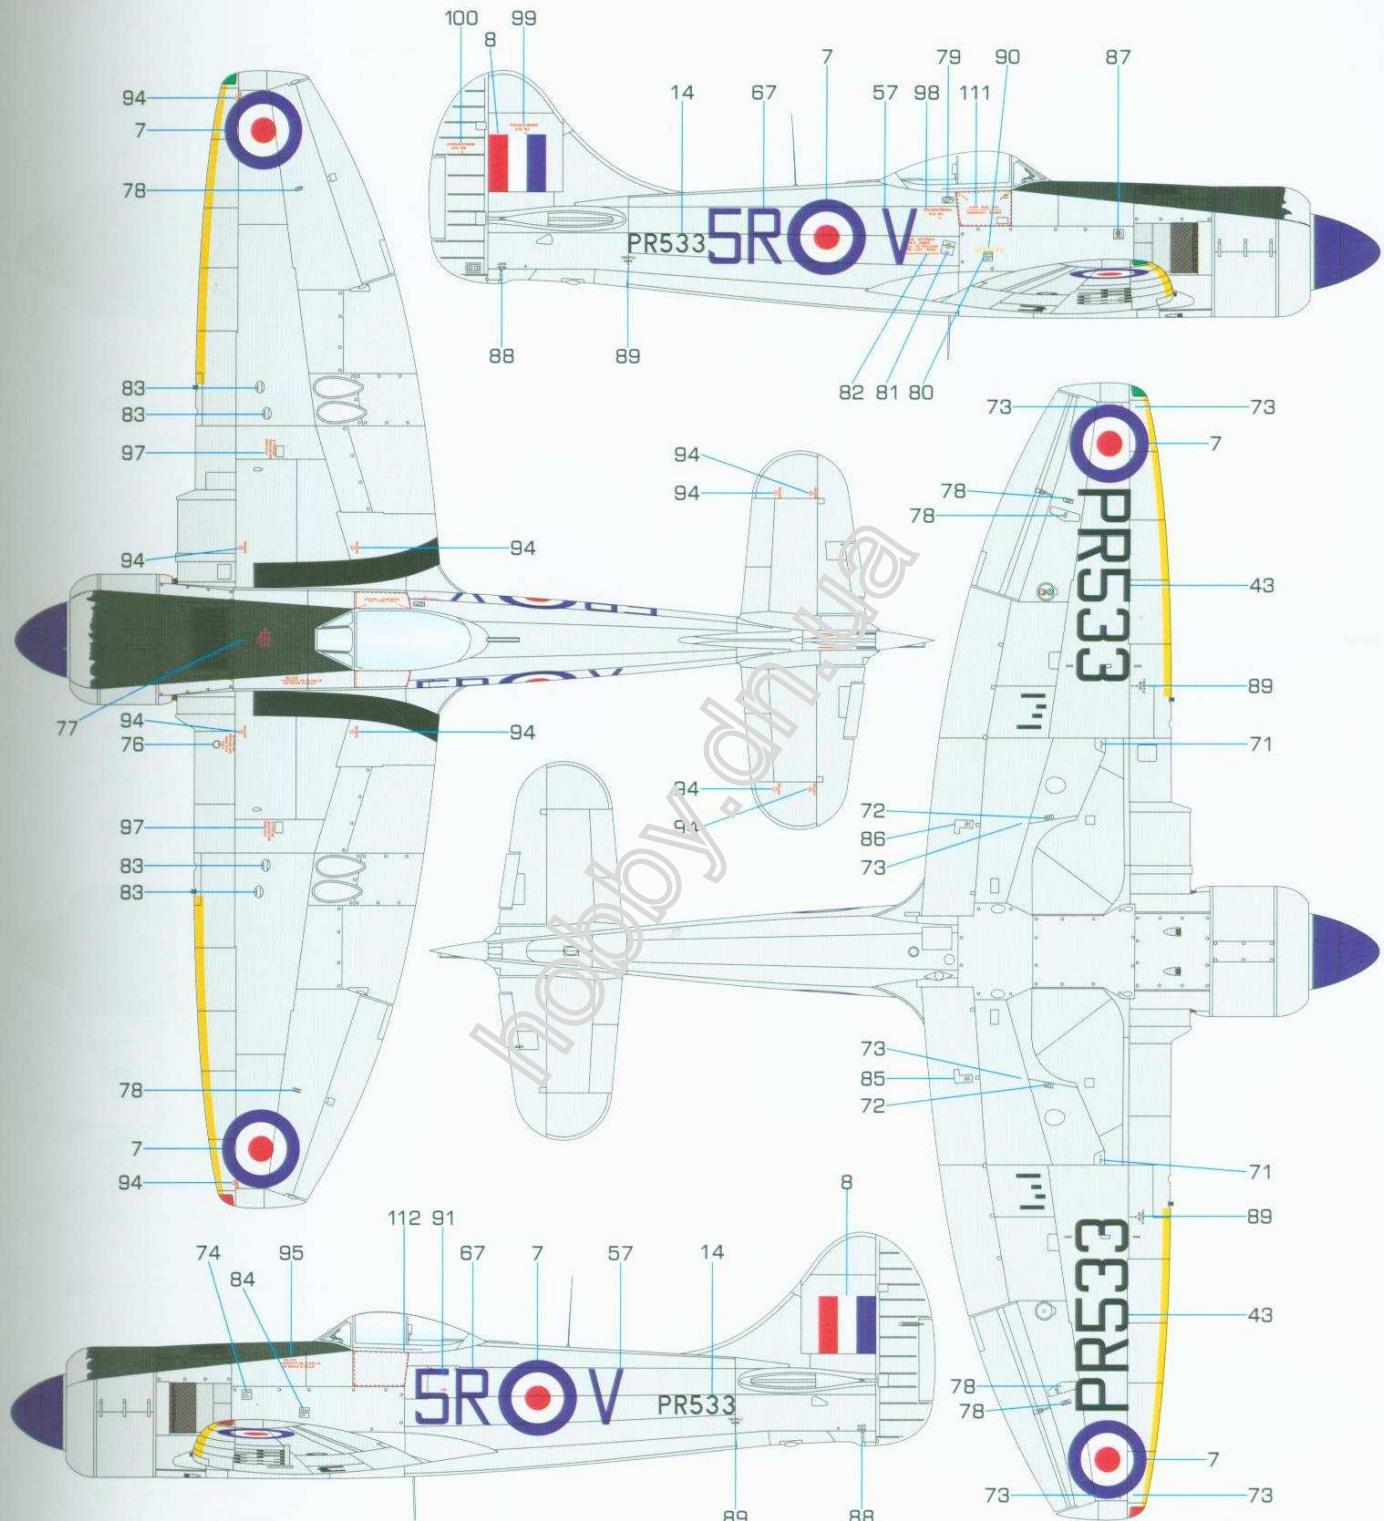

Černá
Black
H2/C2

Jasná modrá
Bright Blue
H15/C65

Hliníkový nástavec
Aluminium Finish
H8/C8

Žlutá
Yellow
H4/C4

**special
horru**

 GUNZE
SANGYO


Anclad II

2016/10

Tempest Mk.II, EG-X / PR733, S/L R.E. Mooney, velící důstojník No.16 Sqn. RAF, BAFO, základna Fassberg, Západní Německo. Stroj PR733 byl ozdoben kresbíčkou blesku a jménem Ulster na levém boku před kabinou. Pod křídlem nesl bombové závěsníky.

Tempest Mk.II, EG-X / PR733, S/L R.E. Mooney, CO of No.16 Sqn. RAF, BAFO, Fassberg, West Germany. PR733 wore the Red Hand of Ulster with a lightning bolt on the stbd side of the fuselage, just forward of the cockpit. Under the wing, the plane carried bomb racks.

CAM. C

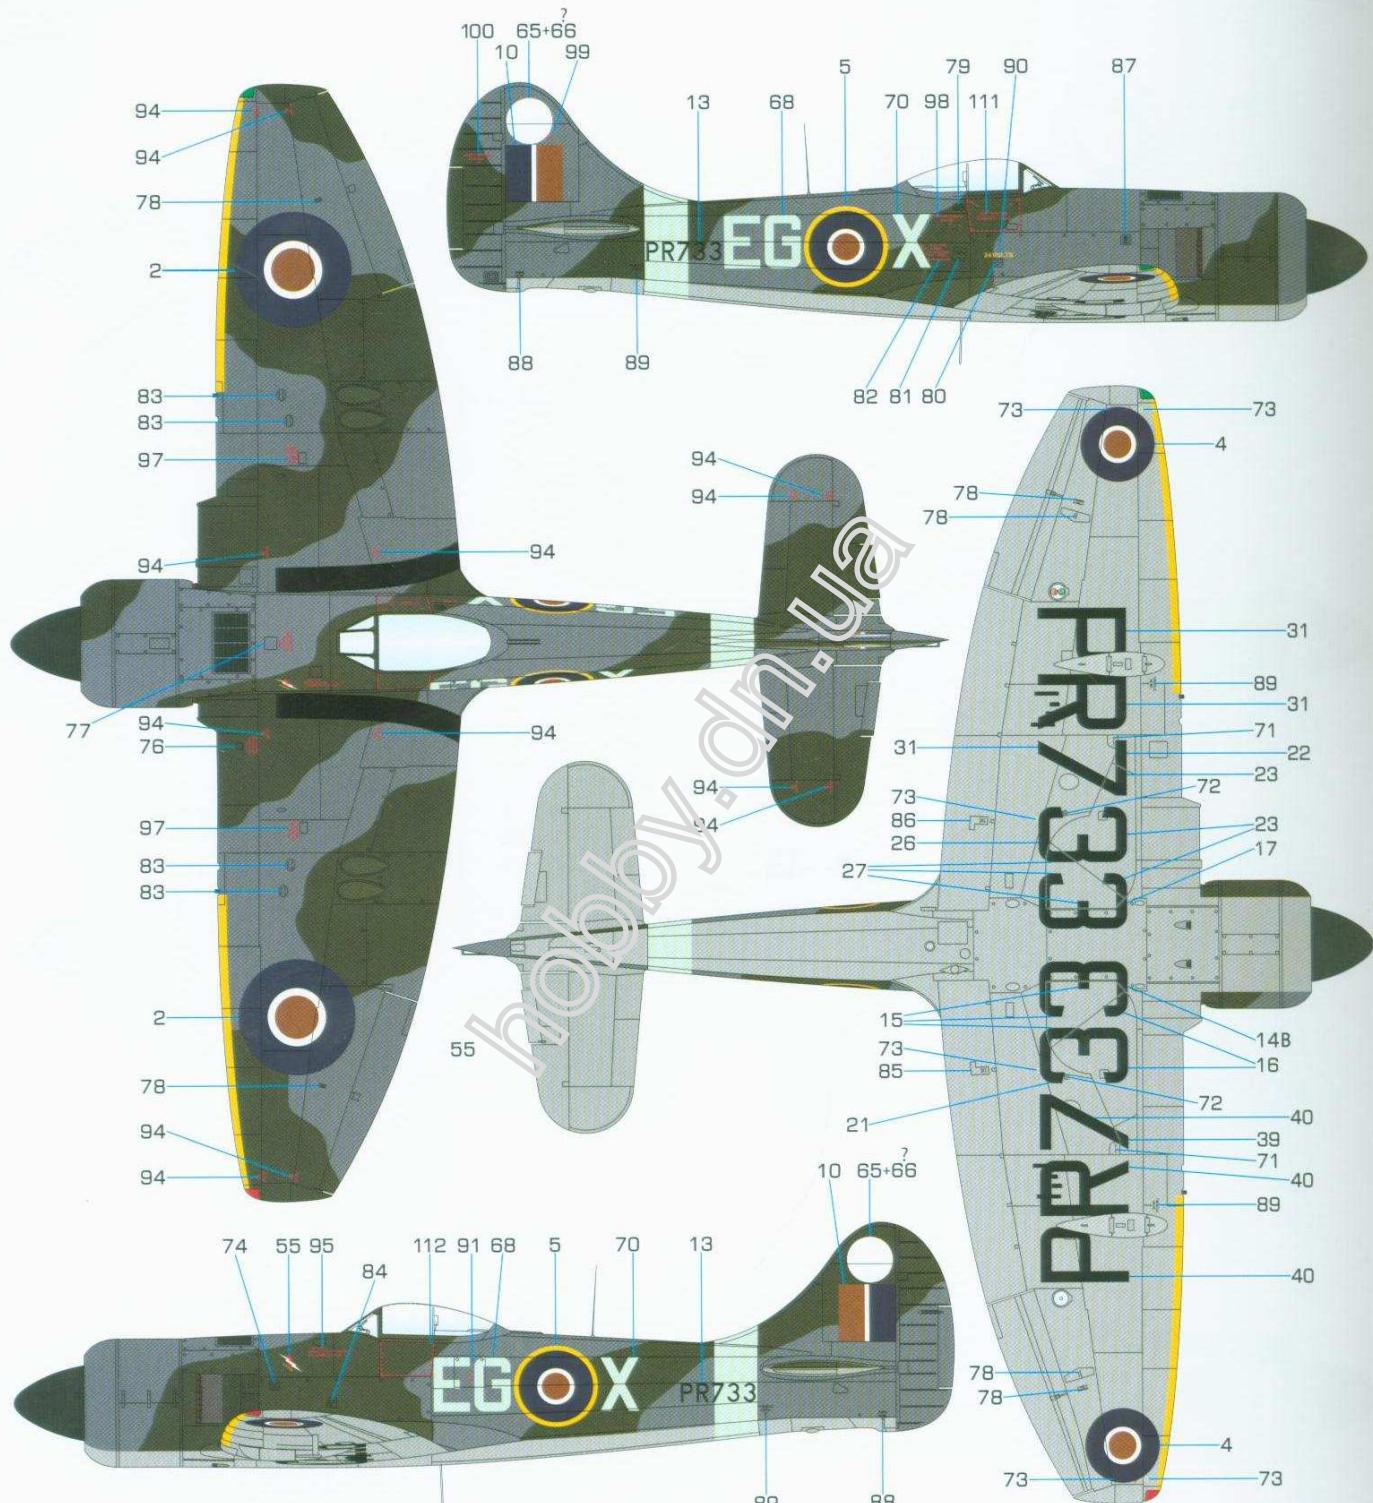

Černá
Black
H2/C2

Tmavá zelená
Dark Green
H73/C23
ALCE013

Oceánská šedá
Ocean Grey
C362
ALCE004

Žlutá
Yellow
H4/C4

Nebeská modrá
Sky
H47/C26
ALCE011

St edn mo ská šedá
Medium Sea Grey
H335/C335
ALCE003

special
HOBBY

GUNZE
SANGYO

Aclad II


2016/10

SH32054 Tempest Mk. II

Tempest Mk.II, T / A139 (ex PR809), No.14 Sqn. RPAF, 1948.

Tempest Mk.II, T / A139 (ex PR809), No.14 Sqn. RPAF, 1948.

CAM. D

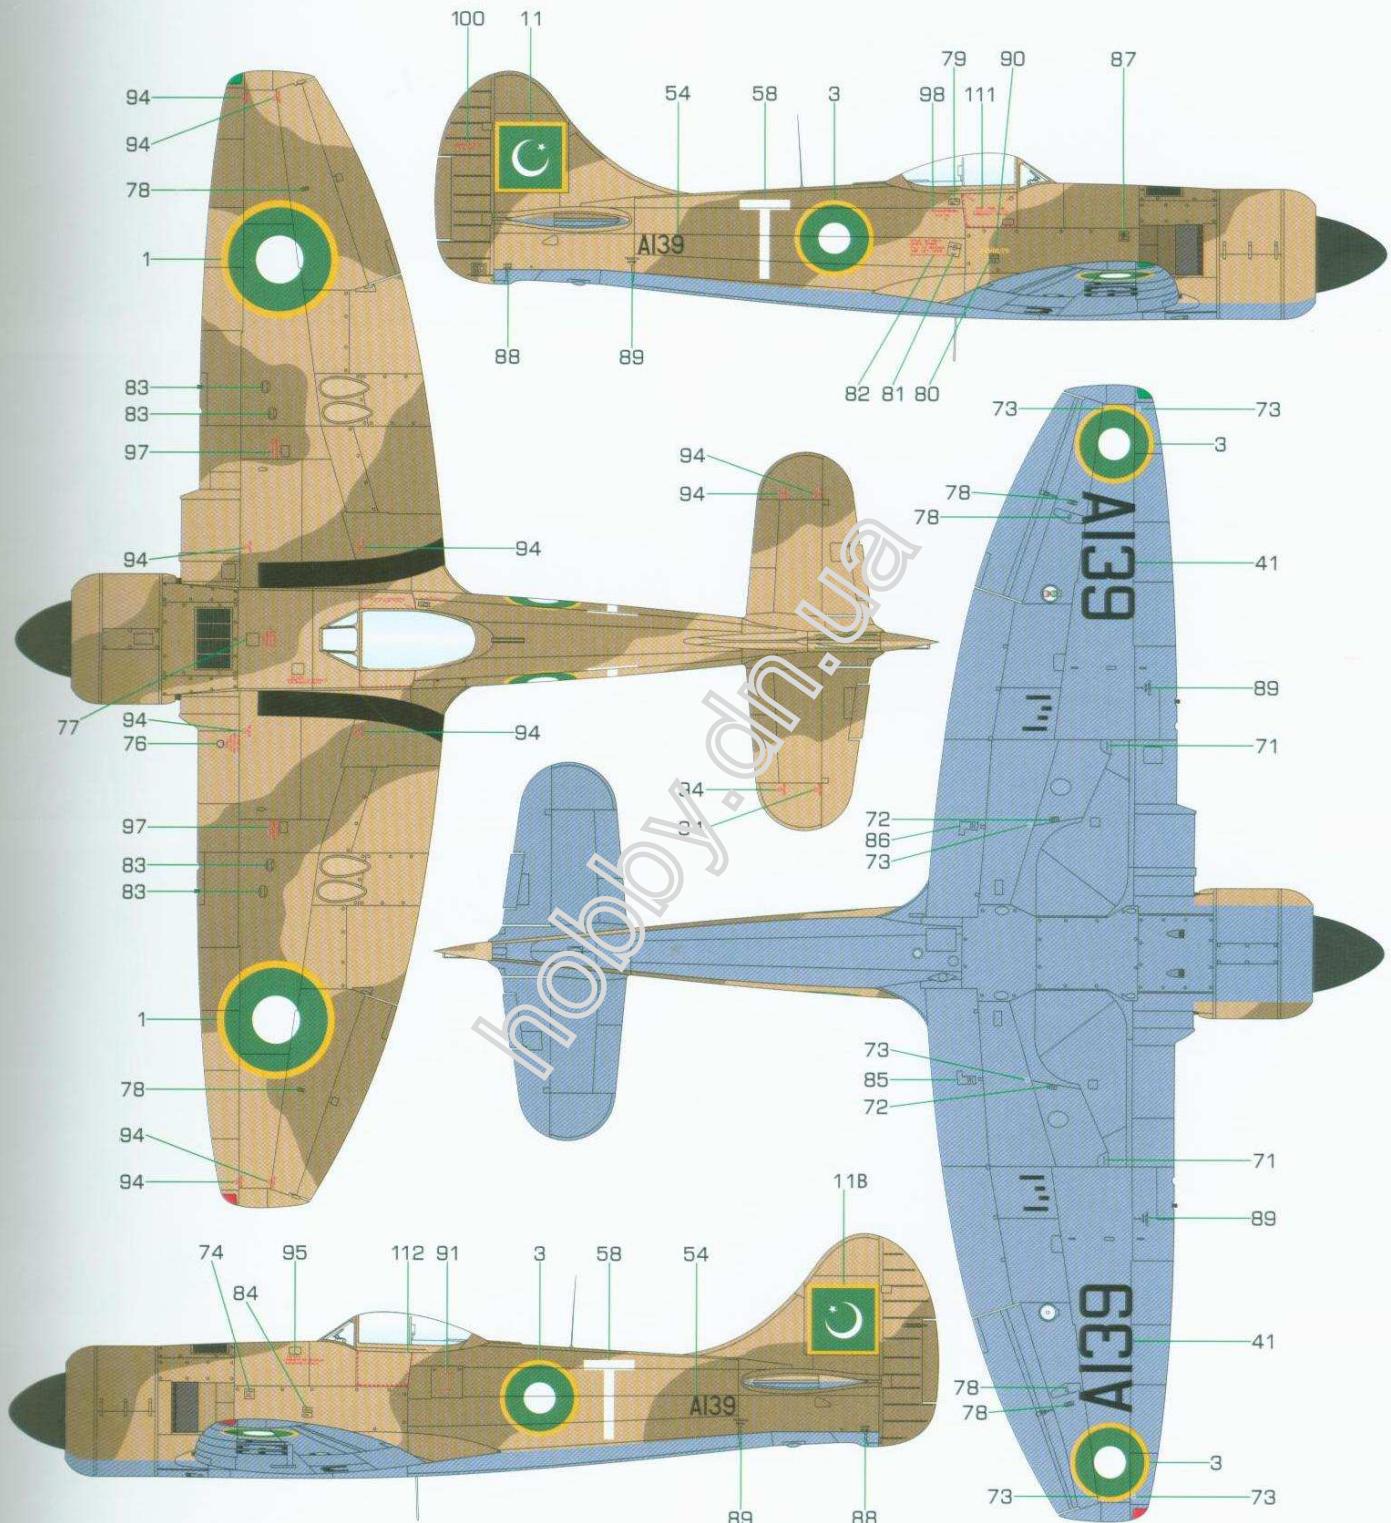

Černá
Black
H2/C2

Zemitá
Earth
H72/C22

Písková
Middle Stone
H71/C21

Azurová modrá
Azure Blue
C370

special
HOBBY

GUNZE
SANGYO

Aicland II


2016/10

SH32054 Tempest Mk. II

Tempest Mk.II, MJ HA557 (ex MW704), RIAF, konec padesátých let minulého století. Letoun létat v hliníkovém nástříku, později dostal černé doplňky. V součastnosti je vlastníkem letadla Chriss Miller z Kanady, který tento Tempest rekonstruuje. Pan Chriss Miller byl velmi nápodceněn při přípravě tohoto modelu, za což jsme mu velmi vděční.

Tempest Mk.II, M1 HA557 (ex MW704), RIAF, late 1950s. The machine wore a painted aluminium scheme and later received black ID markings. This aircraft is currently being restored to original condition by her owner Mr. Chris Miller (Can) to whom we are indebted for his kind cooperation on this kit.

CAM. E

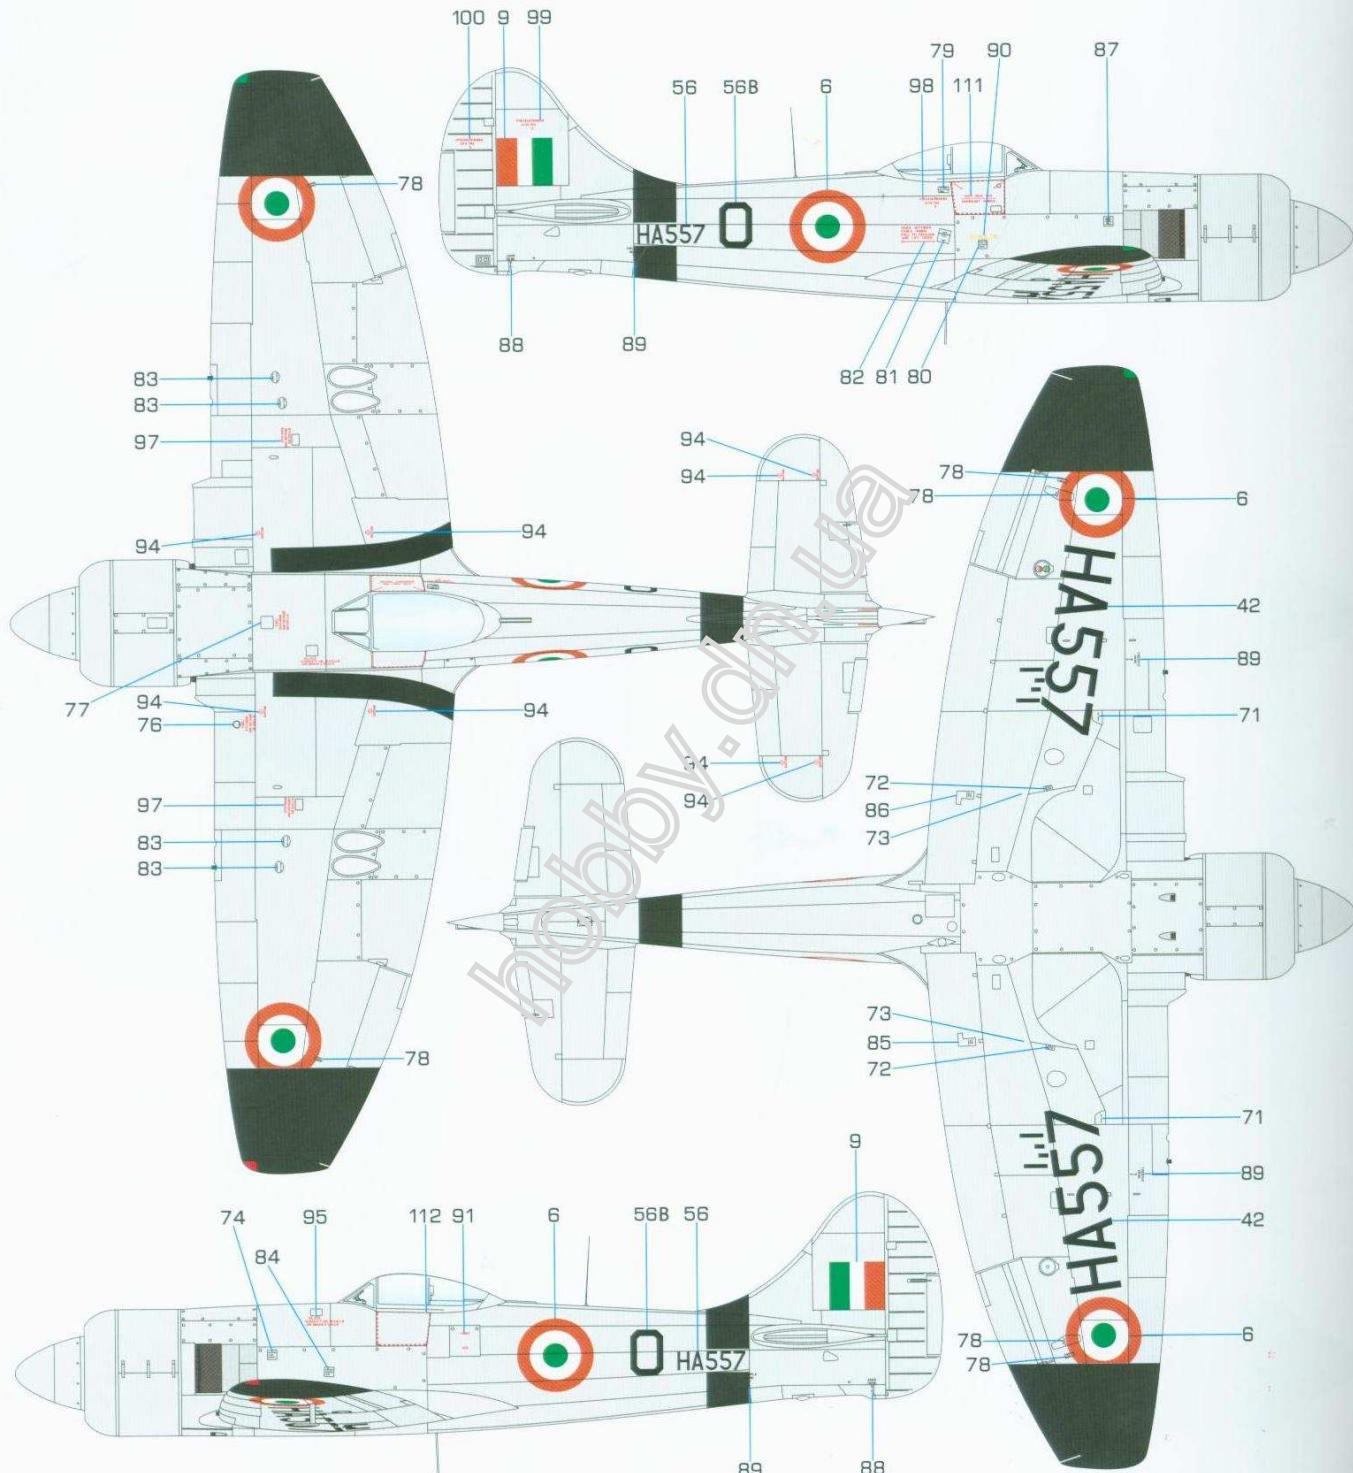

Černá
Black
H2/C2

Hliníkový náštok
Aluminium Finish
H8/C8

**special
offer**

 GUNZE
SANGYO

Enclad II

2016/10

SH.32054 Tempest Mk. II