# ANY V1 MISSILE LAUNCHER WITH E75 BODY Records





ITEM NO: UA72093

The E-50 Standardpanzer was intended as a standard medium tank, replacing the Panther and Tiger I and the conversions based on these tanks. The E-50 hull was to be longer than the Panther, in fact it was practically identical to the Königstiger (Tiger II) in overall dimensions except for the glacis plate layout. Compared to these earlier designs however. the amount of drilling and machining involved in producing these Standardpanzer was reduced drastically, which would have made them quicker, easier and cheaper to produce, as would the proposed conical spring system, replacing their predecessors' torsion bar system which required a special steel alloy.

Other sources show that a variant of the narrow-mantlet 'Schmalturm' turret assigned for the Panther Ausf. F would have been used, coupled with a variant of the 88 mm L/71 gun.

As indicated by its name, the weight of the E-50 would fall between 52 and 75 tonnes. The engine was an improved Maybach HL234 which had 900 hp. Maximum speed was supposed to be column.

## •READ BEFORE ASSEMBLY

- 1. When you use glue or paint, do not near flame, and use in a well-ventiated room.
- 2. Take extra care in handling phote etch parts in order to avoid injury
- 3. When you take parts off the runner frame, use modeling scissors and trice excess plastic with a cutter or a file
- 4. Glue and paint are not included.
- 5. This product is only suitable for experienced more than 14 years and

## SUPERGLUE 强力胶











これ、配之前仔细阅读:



3. 从胶架中取出部件时,应用模型专用剪,并用界刀或小锉除去多余的

1. 勿於近火处使用胶水或油漆,并 打开窗户保持空气流通。

2. 取蚀刻片时应特别注意安全, 防止利边划伤手指。

4. 请使用塑料胶水和油漆,模型内不含。

5. 本产品不适合14岁以下没有经验的模型爱好者。











### DECAL APPLICATION


- 1.Cut off decal from sheet.
- 2.Dip the decal in tepid water 40° C for about 10 sec.and place on a clean
- 3. Hold the backing sheet edge and slide decal onto the model.
- 4. Move decal into position by wetting decal with finger.
- 5. Press decal gently down with a soft cloth until excess water and air bubbles


## 水贴纸的使用:


- 1. 从水贴纸上剪下印花。
- 2. 将印花放入温水中浸10秒, 然后放在干净布上。
- 3. 拿着印花纸板将印花移到模型上。
- 4. 手指蘸水将印花移到适当的位置。
- 5. 用软布轻压印花直至不干, 汽泡消失。

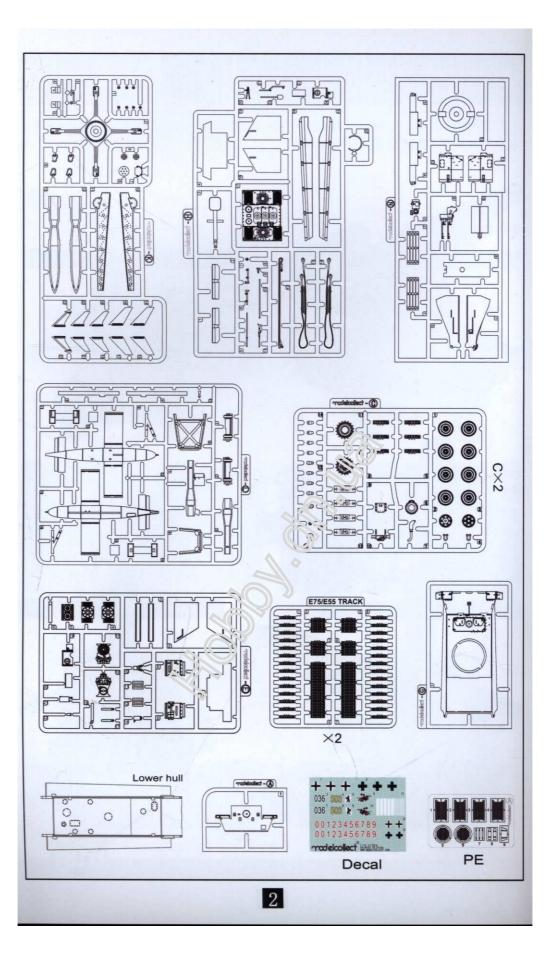


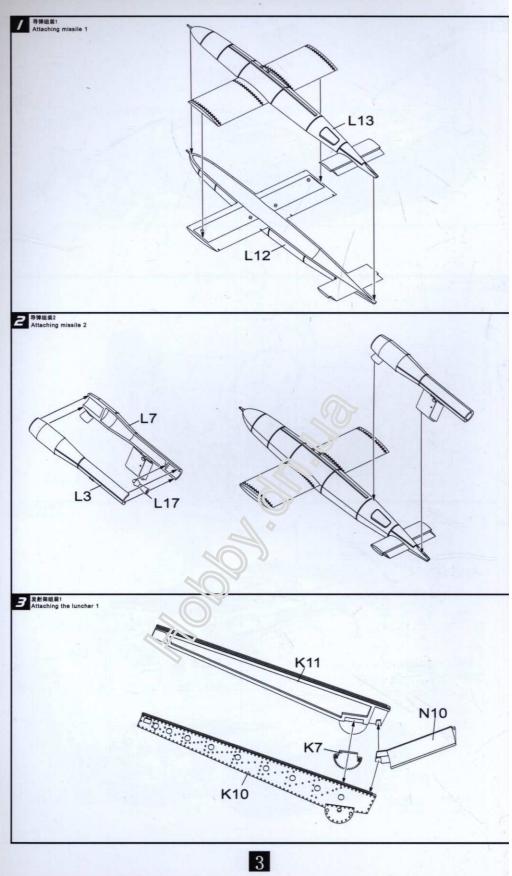


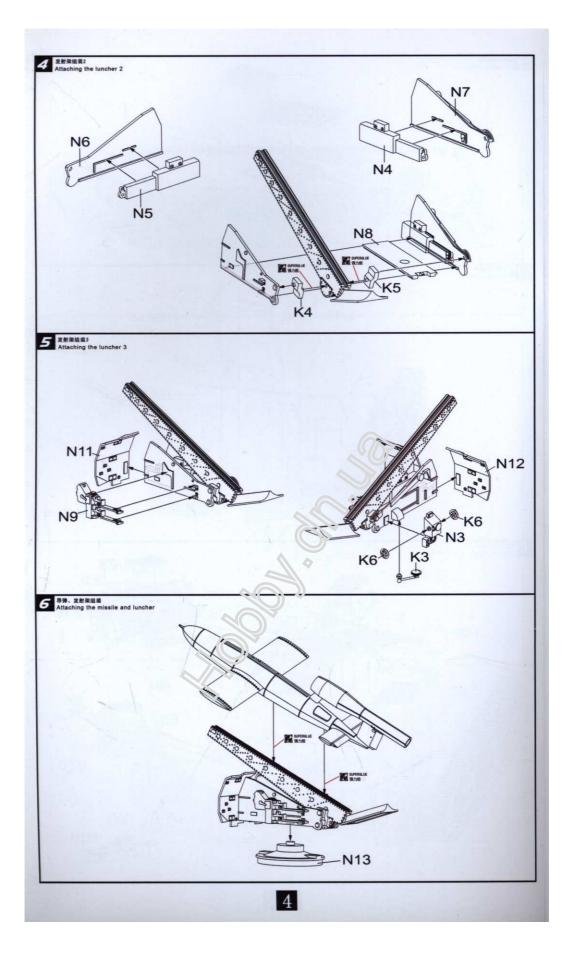

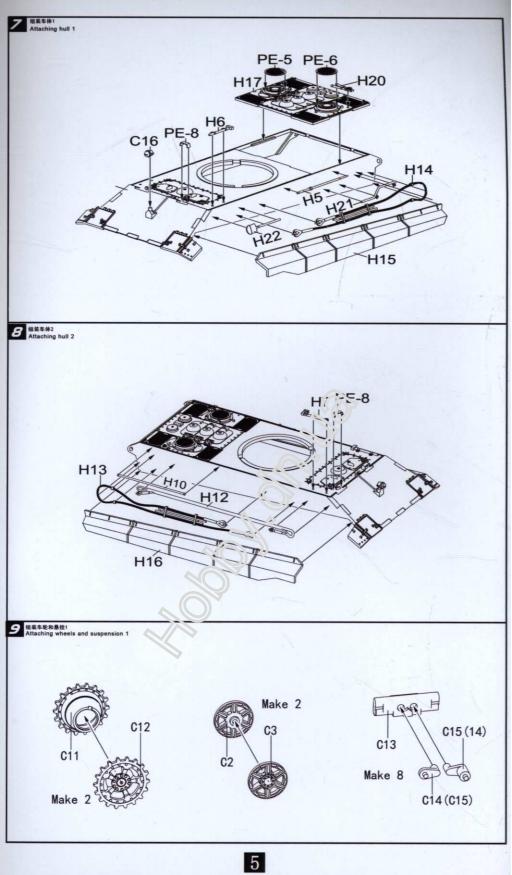

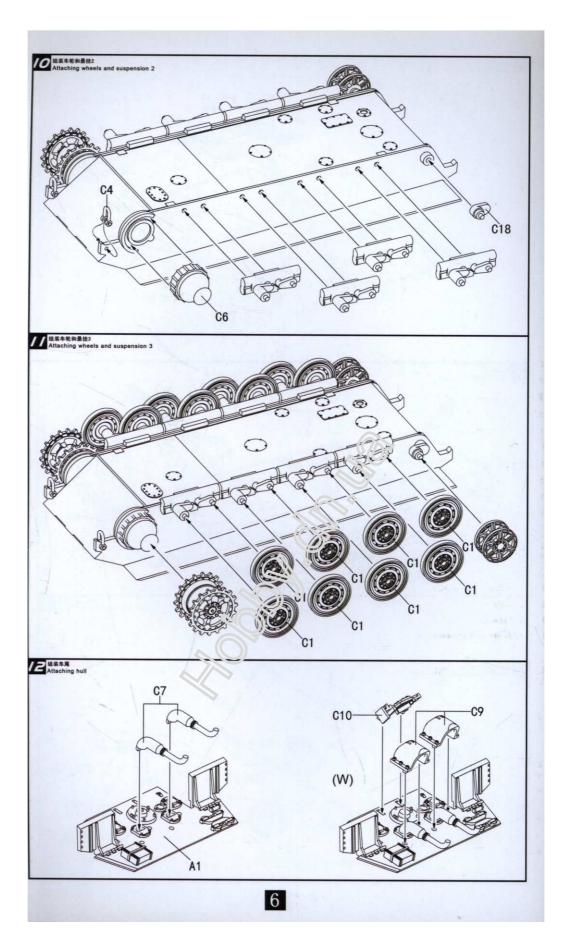

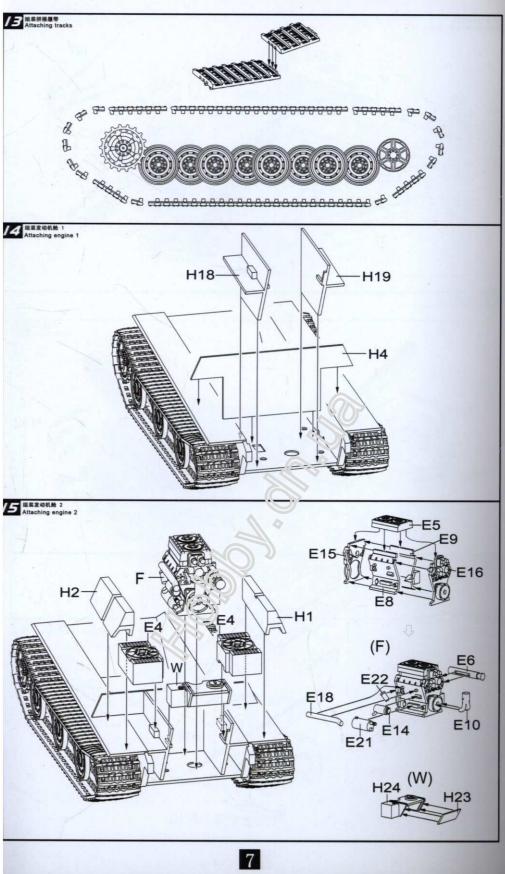

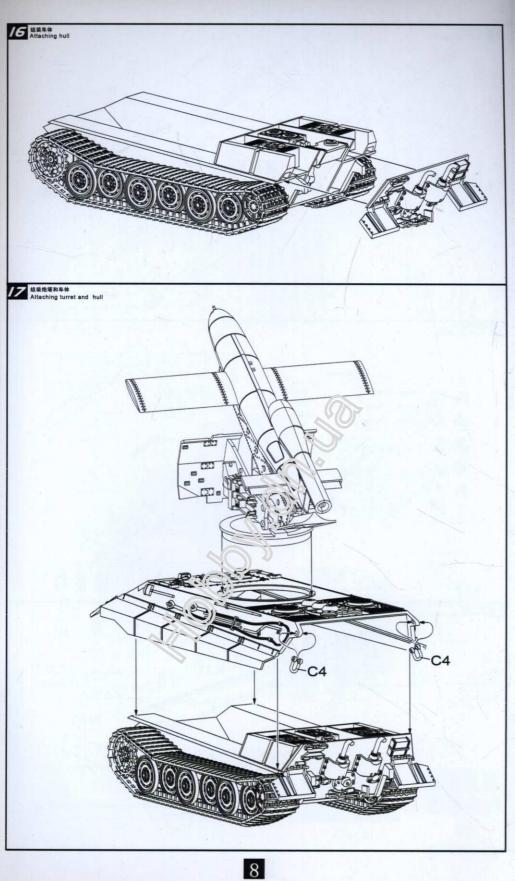





9

MODELCOLLECT

